

# QX SERIES

## ADVANCED RASTERIZERS FOR HYBRID IP/SDI, 4K/UHD, HDR/WCG GENERATION, ANALYSIS & MONITORING



**PHABRIX®**  
A Leader Company


# Qx Series - Technology to power change



From the moment you first power up a Qx/QxL, you'll appreciate the attention to detail in a platform designed to meet the increasing demands of monitoring and testing in SDI/IP hybrid environments. The Qx Series is equally at home in master control rooms, OB and link trucks, production studios, technical QC, product development, engineering compliance testing and operational system monitoring. Whether you are working in HD or UHD, SDR or HDR, SDI or IP, conventional or remote production, Qx rasterizers bring together all the user-configurability and advanced tools required for full operational flexibility when transitioning to your next generation workflows.

Available in two platforms, the Qx and the QxL, with a common look and feel, the Qx Series provides an accessible user interface and intuitive toolsets that help with rapid fault diagnosis and reduce the need for staff training. The comprehensive feature set supports HD/3G/6G/12G-SDI, 10G/25G IP interfaces, and HD/UHD, IP SMPTE 2022-6, SMPTE 2110-10/20/30/31/40 (ST 2110-20 RGB payloads up to 21Gbps) with ST 2022-7, PCAP, Dolby E Decode and AMWA NMOS, easing system design and future proofing your investment.

## Analyzer/Generator - Simultaneous Operation

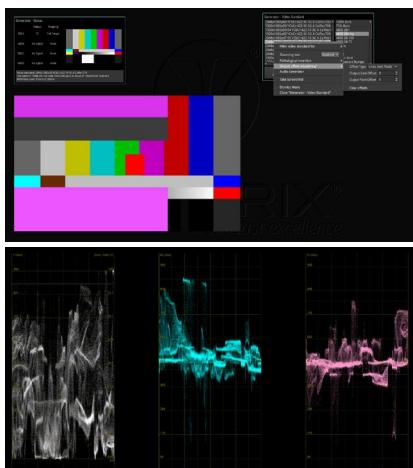


The Qx Series provides Generation and Analysis toolsets that can be used simultaneously either manually or under REST API control, enabling automated closed-loop testing of a wide range of standards and HD/3G/6G/12G-SDI formats for engineering regression testing and manufacturing. With a full suite of SDR Rec. BT 709/2020, plus native and mapped Wide Colour Gamut (WCG) HDR patterns in HLG, PQ, S-Log3 and SR-Live formats, you are equipped for flexible broadcast SDR and HDR operation.

Generator and Analyzer video format, colorimetry and transfer function can all be configured independently. You have the full flexibility to simultaneously send out a UHD Rec BT.2100 HDR pattern with up to 128 channels of audio, and analyze the down-converted, down-mapped HD SDR Rec 709 return at the same time.

## Compliance - it's what test and measurement is all about...isn't it?

Developing products or commissioning the latest equipment is more than just implementation. Equipment has to be tested against the required standards for it to be considered fit for purpose.

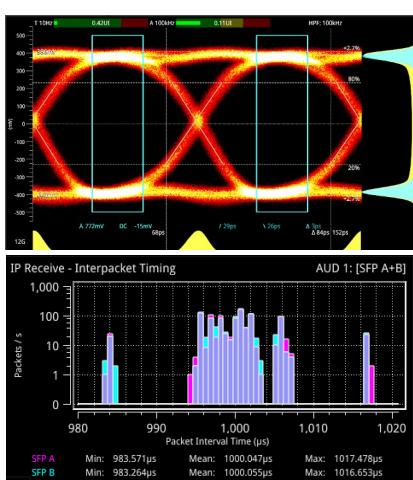

In the 12G-SDI world, noise floors are required to be much lower to ensure that accurate and meaningful measurements can be taken. Qx SDI generation and measurement technology has been specifically adapted for 12G applications. With its unique class leading SDI-STRESS toolset, sophisticated RTE™ (Real-Time Eye) multi-rate physical layer display, and automated SMPTE compliance measurements, the Qx Series offers a single product solution for SDI compliance verification.

If you are working in SMPTE ST 2110, with ST 2059 Precision Time Protocol (PTP), a core IP toolset, available in both the Qx and QxL offers an operator all of the IP confidence status monitoring in an intuitive and accessible manner. The optional IP-MEAS test suite provides a comprehensive set of tools for compliance verification and commissioning of your IP systems and equipment.

Hardware-based timestamping locked to PTP ensures accurate realtime deterministic timing measurements of media flows and ST 2110-21 buffer models.

# Applications



## Outside Broadcast

NEP UK selected Qx rasterizers for two of its new OB trucks, for use at major events and sporting fixtures. Hybrid SDI/IP capability was a key selling point for NEP enabling them to accommodate clients whether they are using conventional SDI or have made the move to IP. The ease of use of the Qx was also a major factor, making it quick and simple for both NEP engineering staff and freelancers to learn and use.

Engineering and Technical Director, NEP UK, said, "We've been very happy with the reliability of PHABRIX test and measurement equipment in the past, so it was an obvious fit to look at the Qx for these new IP-capable vehicles."



## Sports and Live Events

PHABRIX recently concluded nine months of successful HDR technology trials with BT Sport in the run-up to the launch of BT Sport Ultimate. The Qx is now deployed to monitor and analyze SDR and HDR Wide Color Gamut (WCG) material on the live system. PHABRIX supported BT Sport, providing its Qx rasterizers and technical expertise, as they developed and refined their live production workflow for the launch of their new HDR, UHD and Dolby Atmos® supported proposition. On the bench PHABRIX collaborated with BT Sport to analyze and provide suggested settings for SDR to HDR converters and 'tone mappers' used in the trucks and throughout the network.



## Manufacturing & Compliance Testing

Mellanox Rivermax® development and regression testing teams have been using the Qx to provide simultaneous analysis of the SMPTE ST 2110 Video, Audio and ANC DATA flows from their Rivermax® video streaming library for media and entertainment, running on Mellanox ConnectX-5 and newer, Network Interface Cards," said Nir Nitzani, senior director SW development at Mellanox Technologies.

"The ability to install the Qx in the machine room and remotely access and control the realtime measurements from several sites has been an ideal fit with our engineering development workflow."



## Extended Reality (XR)

7thSense chose a PHABRIX Qxl 25G IP ST 2110 rasterizer for SDI and advanced IP 2110 product verification in-house, and at onsite installations. PHABRIX and 7thSense joined forces to develop the capability to output the next generation of ST 2110 IP formats, including UHD/4K 12bit 444 60p.


Richard Brown, CTO, 7thSense, said, "As we begin delivering SMPTE 2110 support from our Delta Media Server and Juggler pixel processor products, we needed to ensure all of our solutions comply to the required specifications. We needed test and measurement technology that we could rely on, was robust, and supported the wide variety of formats we need to test."

# Platforms to suit every workflow

The Qx Series is available in two platforms, the Qx and QxL, both with a common look and feel, providing an accessible user interface and intuitive toolsets for full operational flexibility and easy migration from an SDI to an IP centric operation.

The flexible architecture of both the Qx and QxL offers in-field license upgrades for SDI-UHD/4K, 2110-UHD/4K 48-60p RGB (EUHD), PCAP, Dolby E Decode, HDR, AV test signal generation as well as engineering grade data view and ANC packet inspection tools. A factory fitted hardware option provides RTE™ realtime SDI eye and jitter analysis with the further option of a highly advanced SDI-STRESS toolset.

## PHABRIX Qx - 10GbE/12G-SDI

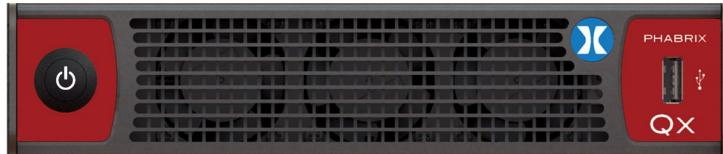


If your focus is on a classical SDI based HD facility and you would like to future-proof your operation for realtime IP, then the Qx will address your needs. The Qx features HD/3G over 10G IP and SDI as standard, with UHD-SDI (6G/12G). Dolby E Decode and HDR available as optional in-field license upgrades. Support for UHD/4K formats in SDI, including some HD/2K extended mode formats, can be added as an optional license (for the full list of UHD standards supported, please see page 25).


A factory fitted SDI Eye and Jitter hardware option and the unique SDI-STRESS toolset provide all the tools for SDI physical layer analysis and compliance testing.

The Qx's core IP toolset supports payloads on native 10G SFP+ interfaces using generic IP SFPs, giving full access to be able to monitor and measure the IP traffic to SMPTE standards. In ST 2110 you can simultaneously analyze ST 2110-10/20/30/31/40 JT-NM tested† flows with Class C Audio (up to 80 channels at 125 µs packet time) all under ST 2022-7 Seamless IP Protection Switching (SIPS) and AMWA NMOS IS-04 discovery and IS-05 device connection management.

Optional in-field upgrades for IP-MEAS and PCAP provide a comprehensive set of tools for ST 2110 compliance verification and commissioning of your IP systems.

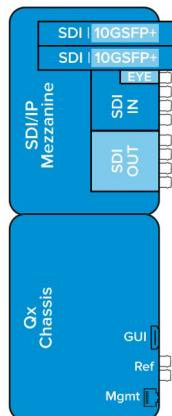

## PHABRIX QxL - 25GbE/12G-SDI

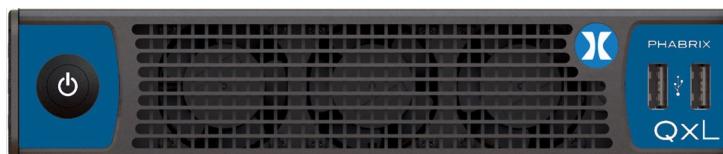


For realtime UHD IP workflows on 25G networks with video payloads up to 21Gbps, the class leading QxL provides support for 2110 and 2022-6 on generic 10G/25G SFP28 interfaces. The QxL is fully 10G/25G IP-enabled as standard, with support for generation and analysis of a JT-NM TR 1001-1:2018, ST 2110-20 (video), up to four\* 2110-30 (PCM) and 2110-31 (AES transport) audio and a 2110-40 ANC media flow, all with 2022-7 Seamless IP Protection Switching (SIPS) and AMWA NMOS IS-04 discovery and IS-05 device connection management.

Independent PTP slaves on both media ports are provided for fully redundant media network operation with AMWA NMOS IS-04 discovery and IS-05 device connection management. The option of HDR, PCAP, Dolby E Decode and IP-MEAS in-field license upgrades means that you can tailor your system to your current needs while retaining full flexibility for the future.

Support for UHD/4K formats for both IP and SDI, including some HD/2K extended mode formats, and UHD 2110 Extended Mode formats (YCbCr/RGB 444, 8-/10-/12-bit; 48 to 60Hz), can also be added as optional licenses (for the full list of UHD and EUHD standards supported, please see pages 25-26).

SDI BNC and SFP media interfaces are available as a factory fitted option. The SDI Eye and Jitter hardware option and the unique SDI-STRESS toolset provide all the tools for SDI physical layer analysis and compliance testing.

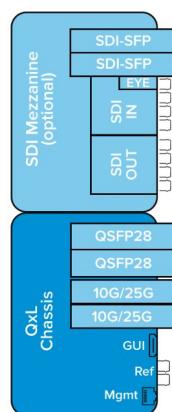


†JT-NM Tested - For more details on the JT-NM Tested Program (Spring 2020) and its test results, please see:  
[http://jt-nm.org/jt-nm\\_tested/](http://jt-nm.org/jt-nm_tested/)

\* Upcoming Software Release

# Simplicity - an interface that puts you in control

The Qx/QxL's innovative app style interface is a radical change from traditional test and measurement systems. Intuitive mouse control with context driven drop down menus hides the complexity of modern SDI and IP systems providing an uncluttered view of critical information. Instruments can be resized, the system auto presenting more information as the screen area permits.

The Qx Series offers a fully flexible user-defined instrument layout, displaying up to 16 instruments on a single 1920x1080 display. Individual instruments can switch between 1/16th, 1/4 or full screen. With an output frame rate of 50, 50.94 or 60Hz to match the video format, the GUI has adjustable brightness for controlled lighting environments.

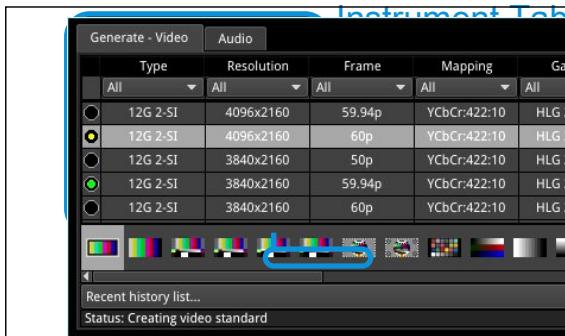


## Instrument Tooltips

- The Qx UI employs a context driven tooltip providing additional information about parameters hovered over

Closest AP pixel: 290 line: 153 field: 1  
Closest sample: 290 line: 97

## Instrument Navigation

- Each instrument includes a pop-up submenu, which gives access to the configuration parameters

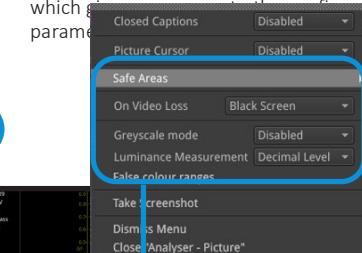

PHABRIX

Take Screenshot

Dismis Menu

## Screen Capture

Analyser - Picture Config network access to event logos and oscilloscope presets

Analyser - Waveform

Generator - Configuration

Generator - Status

Event Logging

Qx Network & Automation

PHABRIX



## Instrument Launch Menu

- The instrument launch menu provides access to the instruments and other system menus available on the unit
- Each instrument available in the menu is listed alongside a designated icon

## Error Highlighting

- Errors are displayed in red font

**Brightness** 8

**Gamma** 124

## Numeric Slider & Scroll Bar

- Adjust numeric values by dragging or scrolling the slider button
- Mouse over the numeric field and scroll for fine control
- Connect to USB keyboard, click and enter specific alpha numeric values

## Network Time Protocol

- Configure the unit to use a date and time transmitted by a target Network Time Protocol (NTP) server or set the time and date manually in the Time and Date dialog.

## Presets

- Multiple display layouts can be saved as presets and presets can be updated
- This allows users to save bespoke layouts for different operational tasks
- Useful for rapidly changing between different screen layouts eg. Audio, HDR or IP focus

# Standard Toolset



As standard, the Qx Series offers a flexible user-defined instrument layout displaying up to 16 simultaneous windows, and the ability to rapidly change between bespoke layouts for different operational tasks with user presets.

Picture view, waveform monitor, vectorscope, 32 channel audio metering, decoded audio channel status information, detection of common Dolby formats, ANC status and payload, on screen display of OP47 and CEA-608 in 708 closed captions and Ancillary Time Code (ATC), Loudness monitoring, and advanced control and logging with human readable event logs, remote operator GUI access over VNC and a full REST API are all provided as standard.



## Picture Display

- Cursors linked to Waveform and Data View
- Action, graphics and user-definable custom safe areas
- 1/16, 1/4 or full size display




## Auxiliary Data Decode

- Closed Captions OP47, CEA-608 in 708
- Primary Closed Caption decode picture window
- ANC Timecode with OSD
- Date, V-chip, AFD and Input name
- SCTE 104 indication and logging




## Analyzer - Picture Copy

- Secondary closed caption decode: Monitor 608/708 closed captions in a second language, or compare different screen safe areas
- Independently manage overlay elements including: Closed Captions, Picture Safe Areas, V-chip, AFD, SCTE 104, Image Center Crosshairs

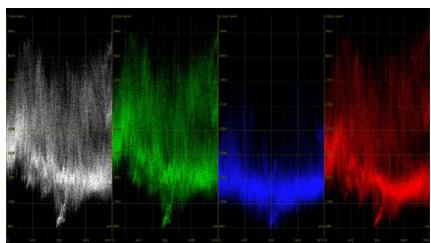


## Analyzer - Waveform

- YCbCr, YGBR and GBR parade modes
- Cursor linked to Picture and Data View
- Single line mode linked to Picture Cursor
- Configurable H and V Graticules
- User markers
- Overlay\*, Stacked\*, Parade, Single line, H & V Mag, Brightness, Persistence and Monochrome controls
- 12-bit processing

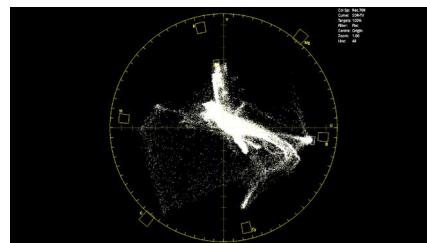

## Analyzer - Vectorscope


- 75% and 100% Targets for ITU-R Rec. 709, Rec. 2020 and HDR formats
- Custom 'user markers' linked to Waveform
- Centre on target or custom user markers
- 0.5x to 4x Mag, center on chosen target
- Single line mode linked to Picture Cursor
- Tooltip display of Cb, Cr and Hue Angle
- IQ axis on/off
- 12-bit processing

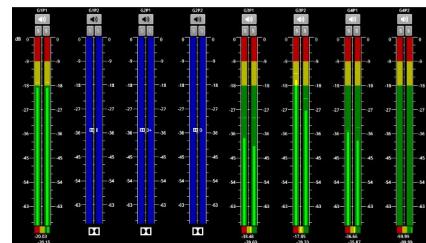

## Analyzer - Audio Meters

- 2 meter windows can be opened, each monitoring a block of up to 16 channels at a time, for a total of up to 32 channels of audio metering
- 2110 audio group display across up to 4 flows\*
- Ballistics: PPM-I, PPM-II, Vu, Vu-Fr, Fast
- Scales: dBFS, dBu -18, dBu -20, BBC, DIN45406, NordicN9
- Adjustable peak hold times: Off, 0.1 s to Inf
- Audio pair correlation meters, numerical level
- Detection of Dolby E, ED2, DD, DD+, DE line pos
- Stereo/mono audio preview bus

Analyser - Audio Channel Status				
Presence Audio 2 Ch1-16: PPEEE++DDPPPPPPPPP Audio 1 Ch1-16: PPPPPPPP.....				
Aud2Ch01	Aud2Ch02	Aud2Ch03	Aud2Ch04	Aud2Ch05
Status CRC Ok	CRC Ok	CRCC Ok	CRCC Ok	CRCC Ok
Us Pro	Pro	Pro	Pro	Pro
Data PCM	PCM	PCM	PCM	PCM
Emphasis None	None	None	None	None
Source Lock Locked	Locked	Locked	Locked	Locked
Frequency 48	48	48	48	48
Chan Mode 2 Channel	2 Channel	2 Channel	2 Channel	2 Channel
85 88 2C 00	00 00 00 00	00 00 00 00	00 00 00 00	00 00 00 85

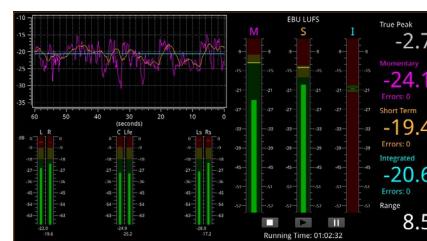

3393+3D Audio	5295+HD Audio	5305 SDI	5348 HD-SDI	5427 Link Encryption	5352 Payload ID
S2016-3 ARD	S2016-4 PAN	S2010 ANS/SDTCE	S2021 DVBT/SDTCE	S2026 MPEG TS	
S2028 3D Packing	S2064 Lip Sync	ITU-R BT.1658	OP47 Caption	OP47 VBI/WST	
ARIB-TR-829	RD08 Metadata	RP223 KLV Metadata	RP223 UMLDID	S2029 Audio	
S2051 Two Frame	RD08 WSS	RP234 Film Codes	S1M4+V+VCode	EIA-708 Caption	
EIA-808 Caption	RP207 Program	S334+ Data	RP208 VBI Data	Mark Definition	
S393+3D Audio	S272 SD Audio	S313 Camera POS		RP163 EDH	

## Audio Status

- 32 channel indication of audio type and presence, PCM, Dolby DE, DD, DD+
- Decoded channel status information for up to 128 channels
- Clear indication of useful audio parameters including CRCC, PCM/data, sample frequency, word length
- Channel Status data view (Hex)

## Loudness Monitoring

- EBU R128 and ITU-R BS.1770
- Indicators for true peak, range, momentary, short term and integrated loudness
- User control of integrated, momentary and short term targets
- User-adjustable true peak alarm threshold
- Loudness logging stored automatically

## Analyzer - Ancillary Status

- SMPTE ST 291 VANC/HANC ancillary data presence/status window
- Grid View – clear visual overview, present/absent/fault indication
- List View – ANC present list with location and status information for Checksum, Parity, DBN
- Link to ANC Inspector
- Tool tip provides ST 291 ANC type overview

\* Upcoming software release



## Data View Analyzer with ANC Inspector

The engineering grade Data View Analyzer and ANC Inspector tools provides easy, accessible visualization of the data on an SDI interface and associated ANC packets. Deep SDI data inspection with full freedom to inspect Active Picture, VANC, HANC and API controls to read back Active Picture Data under automation control is included. Also featured is ANC packet decapsulation and error reporting for detailed analysis and debug of ANC payloads.

Analyzer - Dataview															
16	Y	64	64	64	64	64	64	64	64	64	64	64	64	64	64
16	C	512	512	512	512	512	512	512	512	512	512	512	512	512	512
17	C	512	512	512	512	512	512	512	512	512	512	512	512	512	512
18	Y	64	64	64	64	64	64	64	64	64	64	64	64	64	64
19	C	512	512	512	512	512	512	512	512	512	512	512	512	512	512
19	Y	64	64	64	64	64	64	64	64	64	64	64	64	64	64
20	C	512	512	512	512	512	512	512	512	512	512	512	512	512	512
20	C	512	512	512	512	512	512	512	512	512	512	512	512	512	512
21	Y	64	64	64	64	64	64	64	64	64	64	64	64	64	64
22	Y	64	64	64	64	64	64	64	64	64	64	64	64	64	64
23	Y	64	64	64	64	64	64	64	64	64	64	64	64	64	64
24	Y	64	64	64	64	64	64	64	64	64	64	64	64	64	64
25	Y	64	64	64	64	64	64	64	64	64	64	64	64	64	64
26	C	512	512	512	512	512	512	512	512	512	512	512	512	512	512
26	C	512	512	512	512	512	512	512	512	512	512	512	512	512	512
1520x1080p50 YCbCr4:2:2 10.156 Collect/79 Field 1															

Analyser - Ancillary Inspector	
Identifier	S352 Payload ID (41h 01h)
Trigger Type	Single Shot
Range	All lines
Location	Sub Image 1
Found at location:	Sub Image 1 C-Pos Line 10
000 3FF 3FF 241 101 104 1C4 2C9 180 101	
Data	
Version ID	1h 1
Payload Identifier	89h ST 2082-10 2160 Line 12Gb/s
Picture Rate	9h 50
Progressive Picture	1h True
Progressive Transport	1h True
Sampling Structure	0h 4:2:2 (YCbCr)
Image Aspect Ratio	0h 16:9




## Analyzer - Data View

- Allows analysis of complex faults
- Detailed view of data words in the SDI stream with tooltip hint
- Navigate function for rapid access to a required line, pixel or TRS word
- Color coding to help identification
- Cursor linked to Picture and Waveform

## ANC Inspector

- Ancillary data packet analyzer
- Link from ANC Status window
- User-defined DID/SDID windowed search
- Trigger on error, single shot, continuous
- ANC packet capture with Hex view
- ANC packet decode view

## I/O and Reference Configuration

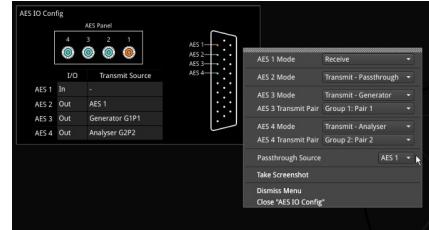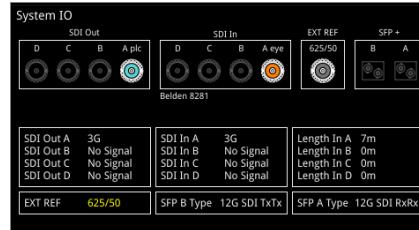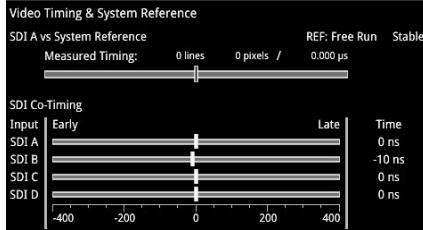

## SDI Video Timing & System Reference

- Measurement of the timing of inputs against reference
- Indication of reference status and stability
- Indication of the relative co-timing of input SDI channels
- Graphical and numeric display

## System IO

- Shows the status of signal inputs and outputs, external reference, cable length, and connector details
- SDI mode: Select BNC or SFP I/O, cable type, loop through and generator copy outputs
- IP mode: Active IP SFP receive inputs and transmit outputs are indicated



Stats - SDI In A			
Data Rate: 11.880000 GHz		Clock Divisor: 1:000	
Cable Length: <20m			
Sub Image 1	Sub Image 2	Sub Image 3	Sub Image 4
Counters Stable	true	true	true
Active Samples Per Line	1920	1920	1920
Active Lines Per Field	1080	1080	1080
Total Samples Per Line	2640	2640	2640
Total Lines Per Field	1125	1125	1125
Total Lines Field	progressive	progressive	progressive
Payload ID Y-Pos	CE C9 80 01	CE C9 80 01	CE C9 80 01
Payload ID C-Pos	CE C9 80 01	CE C9 80 01	CE C9 80 01

## Analyzer - Video Standard

- Display of detected SMPTE S352 Payload ID for each SDI Link and Subframe
- Manual over-ride of S352 ID
- Selection of SMPTE video format
- Indication of S352 errors

## CRC Analysis (SDI)

- Check for CRC errors on Y, C and ANC
- Reporting of the number of SDI input failures, the last failure time, total analysis time and error rates
- Detect active picture changes and view the active picture CRC to observe any changes in the expected active picture CRC value
- SDI switch line CRC masking control, for SMPTE RP168 compliance checking

## Stats - SDI In

- Cable length indication
- Indication of data rate and clock divisor
- Reporting of active and total pixel and line counts
- Y and C payload ID




# Remote Access

Various methods are provided to enable you to establish a remote connection with your Qx or QxL system, depending on your requirements.




## VNC

- Interface employs VNC technology to deliver 16 simultaneous scalable instrument windows over a remote network

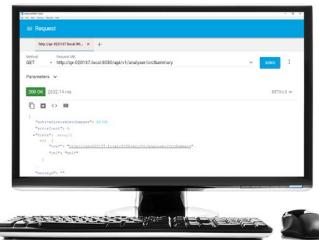

## REST API

- Qx/QxL can be controlled remotely over a network via a REST API
- Integrated control, monitoring and automated manufacturer testing

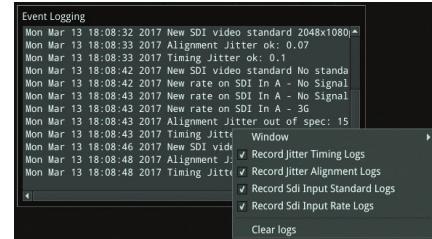

## Event Logger

- SDI Input standard/status
- SDI physical layer timing and alignment jitter
- Rest API requests
- IP-Tx, IP-Rx, Flow and SFP records
- Reference Locking
- Audio input presence

LLDP Info			LLDP: Active		
	SFP A Neighbour	SFP B Neighbour		Mgmt Neighbour	
Sys Name	switch-16628c	switch-16628c		phobos.phabrix.local	
Sys Descr	MSN2010.Onyx.SWv3....	MSN2010.Onyx.SWv3....		Ubuntu 18.04.3 LTS	
Chassis ID	EC:0D:9A:FC:D0:00	EC:0D:9A:FC:D0:00		Linux 4.15.0-88-generic	
Port ID	Eth1/8	Eth1/11		00:1b:21:3a:45:d6	
Port Descr				enp3s0	
Mgmt IP	192.168.10.254	192.168.10.254		192.168.10.231	
Primary VLAN	0	0		0	

Qx Network & Automation					
Interface	Up	MAC Address	00:1F:7F:00:56:78	IP Addressing Mode	Dynamic
IP Address	192.168.0.104				
Gateway	192.168.0.1				
Default Gateway	192.168.0.1				
DNS Server	192.168.0.10				
mDNS Server	qx-022136.local				
REST API	Listening on port 8080				
VNC Server	No Connections				

## LLDP

- Identify port and device to which the Qx/QxL interfaces are connected
- Restrict information communicated over LLDP for IT security purposes
- Also available in ST 2110 and ST 2022-6 boot modes

## Mgmt Interface Config

- Manual or Dynamic Addressing modes
- mDNS and DNS
- Select Default Gateway from Media or Management interfaces
- Control access to REST API and VNC


## USB File Manager

- Copy presets, instrument logs, screenshots and user TIFF images to and from USB memory stick
- Delete selected files

- File Transfer: FTP or Browser access to screenshots and PCAPs, User Test Patterns (TIFF), log files

- Remote Software Product Updates
- HDMI: UI video (1080p), UI audio (2-ch), local mouse
- SDI: UI video (1080p), UI audio (2-ch), local mouse
- VNC: UI video (1080p low frame rate), remote mouse with screenshots
- KVM: HDMI or DVI (1080p compressed), remote mouse with screenshots
- ST 2110: UI (-20), Audio 2-ch (-30)
- UI audio available as analog on D26 (rear panel)
- Machine Control via JSON API
- Many KVM Options available - including Long Distance Connectivity, Cloud-based solutions, multiple access

## Qx Series Remote Connectivity


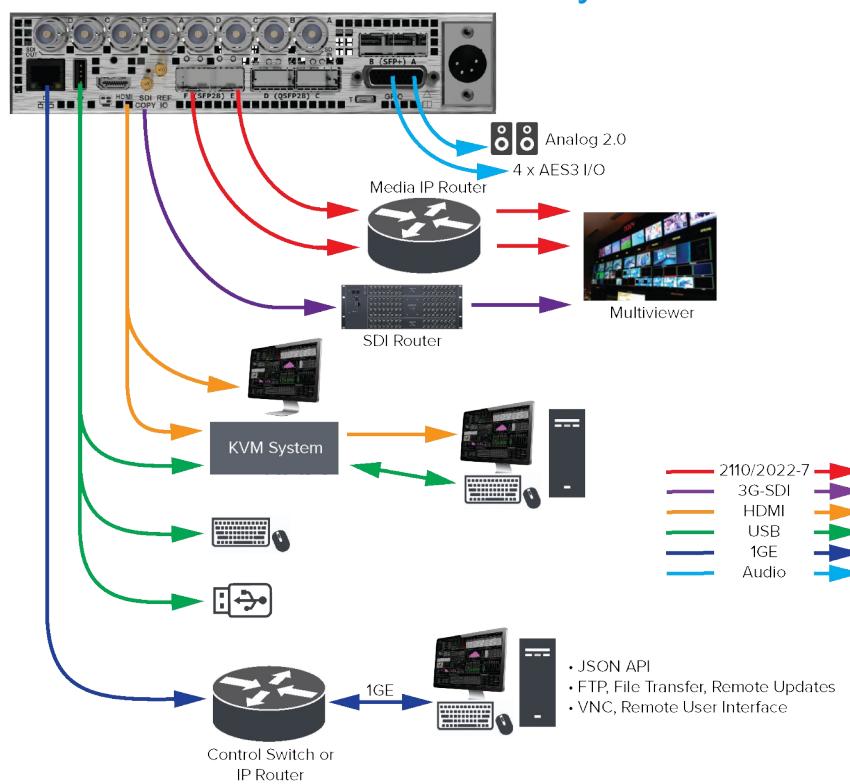


# Optional Toolsets



## Fast, automated 12G-SDI physical layer analysis [PHQX01E or PHQXL-01E]

The Qx Physical Layer Toolset is a factory fitted option for fast 12G/6G/3G/HD-SDI physical layer commissioning, testing and development. Its RTE™ (Real-Time Eye) Technology instantly highlights any SMPTE compliance issues and its realtime SDI jitter window provides simultaneous monitoring across five specified frequency bands, jitter histogram and video trigger options. Built-in automation control allows testing to be performed faster, more reliably and at lower cost. Included in the option are a full range of SDI eye measurements including amplitude, DC offset, transition times, overshoot and health indication with both amplitude and time histograms, as well as choice of color, heat-map overlays and infinite persistence display.

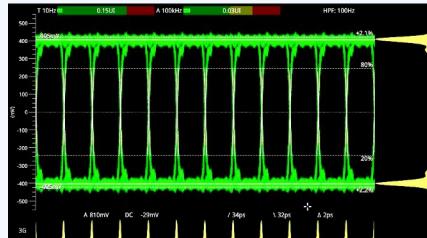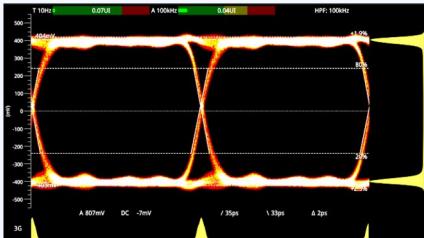


### SDI EYE Analysis

- Real-Time Eye (RTE) for testing SMPTE compliance with indication of DC offset
- Automatic measurements of: DC level, amplitude, rise and fall time, rise/fall overshoot, visual rise time indication
- Amplitude and time histograms
- Single or multiple eyes with choice of color, heat-map overlay and infinite persistence
- Timing and Alignment jitter thermometers
- User-definable time measurement cursors

### SDI Jitter Analysis

- Realtime SMPTE jitter measurements down to 10Hz
- 10Hz, 100Hz, 1kHz, 10kHz, 100kHz filters
- H, 2H, F, V Trigger
- Persistence control 'none' to 'infinite'
- +/- 0.25 to +/- 64 UI vertical scale adjustment
- Jitter amplitude histogram

### Standard Eye Analysis

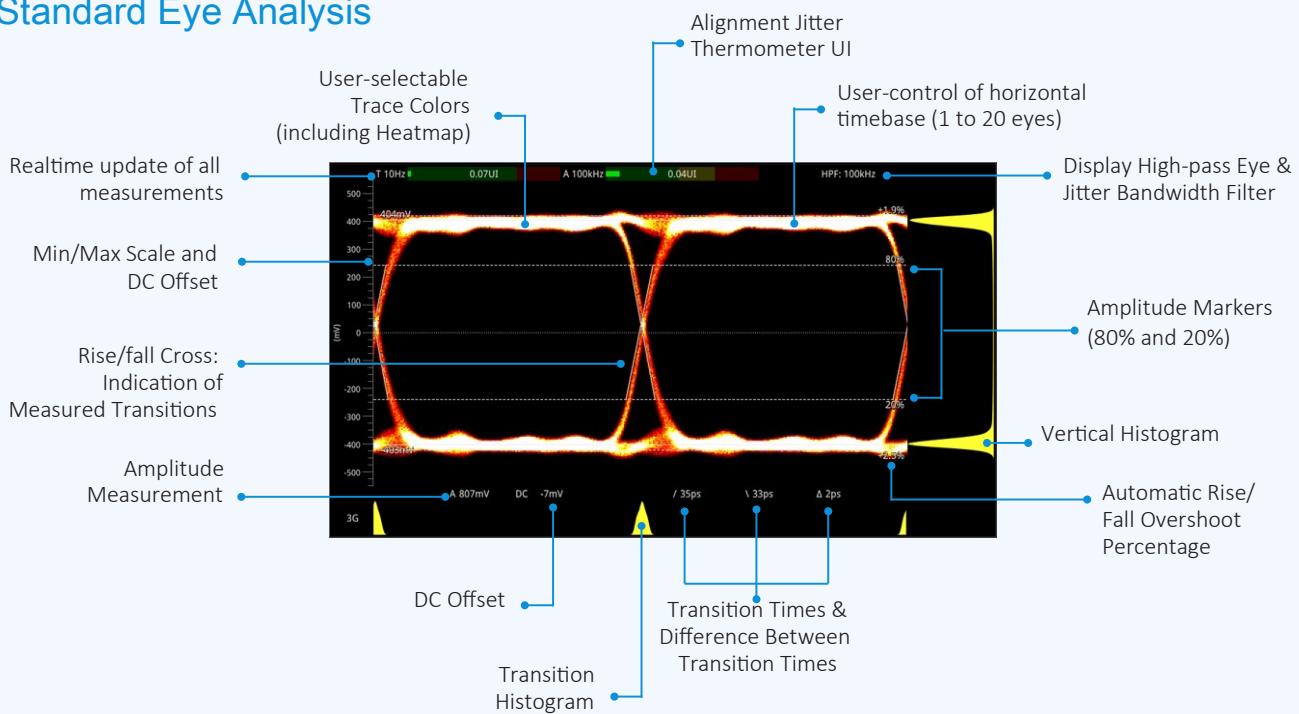


# Optional Toolsets




## SDI-STRESS Testing [PHQXO-SDI-STRESS]

The advanced SDI-STRESS option is available for stress testing and R&D evaluations of SDI interfaces up to 12G. A comprehensive API is included for rapid automation testing. The option includes the ability under automation control to insert SDI clock jitter from 10Hz to 10MHz (128UI max) peak to peak, mute any of the SDI outputs, and control the SDI scrambler, sync-bit insertion, pre-emphasis, rise time and driver amplitude. The SDI-STRESS Eye amplitude measurement provides both Shorth Mean or Mode, with a histogram overlay and a user-defined window for the exploration of eye amplitude. Pseudo-Random Binary Sequence (PRBS) generation and analysis of PRBS-7, 9, 15, 23, 31 allows for deterministic measurement of link Bit Error Rates (BER).

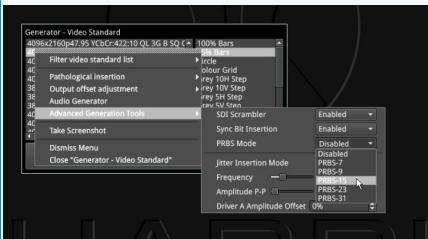

PRBS - Analysis			
Clock Rate	Total Rx (Gb)	Total Errors	BER
SDI A	385	3	1.9315e-10
SDI B	385	3	1.9315e-10
SDI C	385	3	1.9315e-10
SDI D	385	3	1.9315e-10

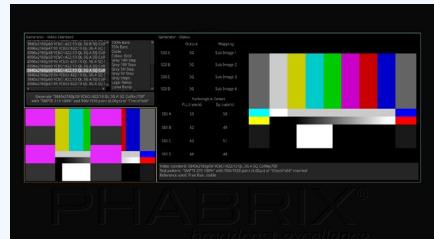

### Adv. Generator Tools

- Control of jitter insertion frequency and amplitude
- SDI scrambler and sync bit Insertion on/off
- SDI Bit Error (BER) insertion tool
- Control of SDI driver amplitude +/-15%
- Control of pre-emphasis, rise/fall time

### PRBS Analyzer


- Indication of PRBS cumulative received data and PRBS type
- Generation of PRBS-7, 9, 15, 23, 31
- Reported cumulative errors
- Calculated Bit Error Rate (BER)

### Pathological Detector

- Generator status indication of rate at which the video pattern generator is creating SDI pathological conditions
- Indication of PLL and EQ pathological rates/second
- Detection on each active SDI link
- Realtime GPI outputs of pathological detect for external equipment triggering

### Advanced Eye Analysis

(Additional features with SDI-STRESS option)

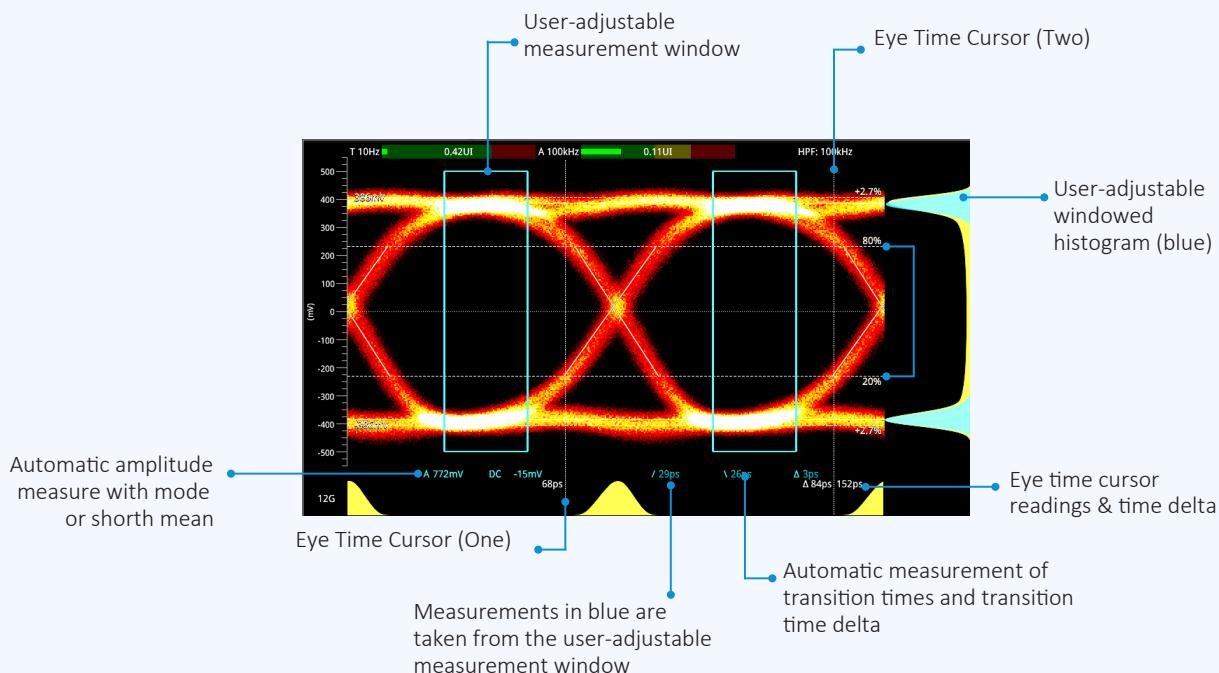


# Optional Toolsets




## Audio and Video Generation [PHQXO-GEN]

Simultaneously generate and analyze a comprehensive set of SDI and IP formats with the audio and video generation option. Moving test patterns with up to 32 channels of embedded audio per link or sub-field (up to 128 channels on 12G interfaces) is included. The Generator toolset option provides not only the core full screen SDI Pathological stress patterns (Eq, PLL, Clk, CheckField), but uniquely also allows the user to define a percentage combination of the SDI pathological and conventional generator patterns up to full frame. Importing TIFF files for checking of HDR/WCG graphics or display and evaluation with user-created test images is also included. The QxL offers a ST 2110-20 2K/HD, 4K/UHD video flow generator, 2110-30/31 80 channel audio generator and 2110-40 ANC flow generator. Uniquely, the QxL can also generate both pattern and UI 2022-7 flow pairs. The GUI as a flow offers 1 x ST 2110-20 user interface video and 1 x 2110-30/31 2.0 stereo monitoring bus audio with 2022-7. An IP Transmit configuration tool providing an at-a-glance view of transmitted flow status and selected formats.

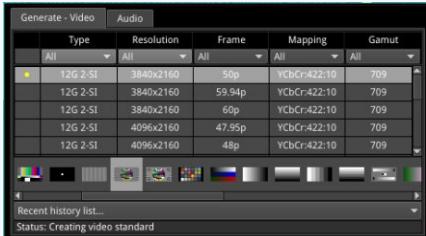


### SDI Video Generation

- 12G/6G/3G/1.5G 4K/UHD and 2K/HD SDI signal generation
- Support for Single, Dual, Quad link SDI formats. Square division, 2SI, Level A & B
- 422, 444, 4224 and 4444, YCbCr and RGB formats, 10/12 bit
- Moving test patterns (bouncing box)
- Import/display TIFF images

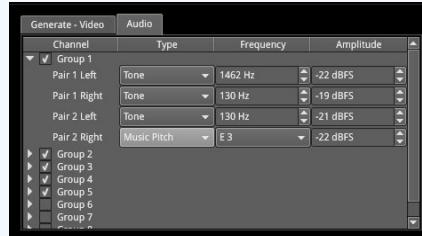

### SDI Audio Generation

- Choice of fixed tones or chromatic scale – to help with channel identification
- Choice of fixed or ramp levels – to help with channel identification
- Custom config of number of active audio groups and channels
- Master gain control
- ST 2022-6: 32 channel audio generation can be replicated in all sub frames providing a total of up to 128 channels

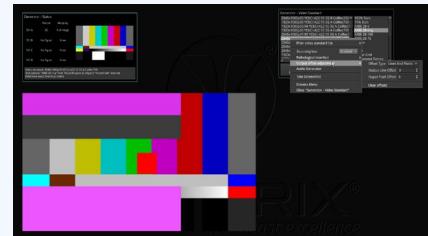


### Pathological Generation (SDI Only)

- Conventional SDI pathological stress patterns, Eq, PLL and CheckField
- New proposed SMPTE combined pathological stress pattern: Eq + PLL + Color Bars + Clock
- Define a percentage combination of SMPTE or SDI pathological and conventional patterns up to full frame




### 2110 Video/ANC Generation (QxL Only)

- 2110: Generate ST 2110/2022-7 Test Signals as a flow
- 2110: Monitor (GUI) as a flow
- 2110-20: 2K/HD, 4K/UHD video flow generator (422/444, YCbCr/RBG, 10/12-bit)
- 2110-40: 1 x ANC flow generator
- Timecode Generator ATC\_LTC, ATC\_VITC, locked to PTP or Local Time with Jam Sync and Drop Frame, VITC1/2 Reverse and signaling of SDI Line number and H Offset
- Import of TIFF images
- Bouncing Box pattern movement
- ST 2110-20 eUHD 47.95-60p RGB YCbCr 444 formats [PHQXO-EUHD]\*

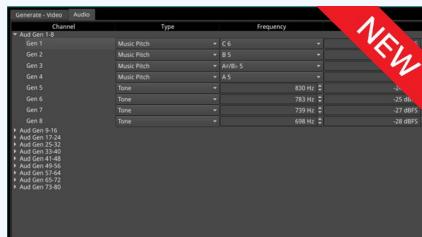

### 2110 Audio Generation (QxL Only)

- 2110: Generate up to four ST 2110/2022-7 audio flows
- 2110-30/31: Up to:
  - 80 audio channels 2110-30 at 125µs
  - 60 audio channels 2110-31 at 125µs
  - 10 audio channels 2110-30 at 1ms
  - 7 audio channels 2110-31 at 1ms

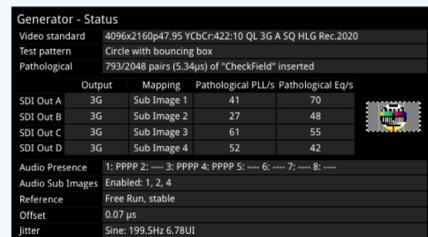

### Generator - Status (SDI Only)

- Confirms generated Video Standard and Test Pattern details
- BNC output, SFP output and sub image/full image mapping information
- Video Reference, output offset adjustment and Jitter insertion (with optional SDI-STRESS Toolkit) details
- Reporting of SDI STRESS pathological insertion statistics

\* Upcoming software release

# Optional Toolsets



## Audio and Video Generation [PHQXO-GEN]

### IP Transmit - Tx Status

Current Total Bandwidth used on SFP E Interface

Current Total Bandwidth used on SFP F Interface

Active PTP Reference

Transmit Flow Status Tabs

Summary of SFP E Tx Flows

Summary of SFP F Tx Flows

Individual flow bandwidth

Tx packet counters

**NEW**

IP Transmit		SFP E: 6.896 Gbps (27%)		SFP F: 6.896 Gbps (27%)		PTP SFP E				
Tx	VID	SFP	Protocol	Type	Dst IP	Dst MAC	Src IP	SSRC	Bandwidth	Pa...
VID	E	2110-20	96	239.20.15178	01:00:5E:09:14:01	192.168.10.14.5178	123456	4.704 Gbps	42...	
VID MON	E	2110-20	96	239.20.35178	01:00:5E:09:14:03	192.168.10.14.5178	123456	2.178 Gbps	187754...	
AUD1	E	2110-30	97	239.30.15178	01:00:5E:09:14:01	192.168.10.14.5178	123456	2.736 Mbps	51011791...	
AUD2	E	2110-30	97	239.30.35178	01:00:5E:09:14:03	192.168.10.14.5178	123456	2.736 Mbps	51011791...	
AUD3	E	2110-30	97	239.30.55178	01:00:5E:09:14:05	192.168.10.14.5178	123456	2.736 Mbps	51011790...	
AUD4	E	2110-30	97	239.30.75178	01:00:5E:09:14:07	192.168.10.14.5178	123456	2.736 Mbps	51011789...	
AUD MON E	E	2110-30	97	239.30.95178	01:00:5E:09:14:09	192.168.10.14.5178	123456	2.736 Mbps	51011788...	
ANC	E	2110-40	100	239.90.15178	01:00:5E:09:28:01	192.168.10.14.5178	123456	45.120 kbps	29667083...	
VID	F	2110-20	96	239.9.20.25178	01:00:5E:09:14:02	192.168.20.17.5178	123456	4.704 Gbps	425228089...	
VID MON F	F	2110-20	96	239.9.20.45178	01:00:5E:09:14:04	192.168.20.17.5178	123456	2.178 Gbps	187731926...	
AUD1	F	2110-30	97	239.9.30.25178	01:00:5E:09:14:02	192.168.20.17.5178	123456	2.736 Mbps	510116775...	
AUD2	F	2110-30	97	239.9.30.45178	01:00:5E:09:14:04	192.168.20.17.5178	123456	2.736 Mbps	510116778...	
AUD3	F	2110-30	97	239.9.30.65178	01:00:5E:09:14:06	192.168.20.17.5178	123456	2.736 Mbps	510116774...	
AUD4	F	2110-30	97	239.9.30.85178	01:00:5E:09:14:08	192.168.20.17.5178	123456	2.736 Mbps	510116765...	
AUD MON F	F	2110-30	97	239.9.30.105178	01:00:5E:09:14:0A	192.168.20.17.5178	123456	2.736 Mbps	510116770...	
ANC	F	2110-40	100	239.9.40.25178	01:00:5E:09:28:02	192.168.20.17.5178	123456	45.120 kbps	29667027...	

- At a glance status overview of all flows being encapsulated and transmitted
- Simultaneously transmit two different types of flow from the unit: Generator Flows and Monitor (GUI) Flows
- Displays a summary of the current status of all selected generator / monitor video, audio and ancillary flows being transmitted
- Use this tab as an overview of all flows actively being transmitted from the unit, together with the active PTP reference and an indication of bandwidth used by each stream and the total bandwidth used on each interface
- Displays the current information about the test pattern VID, AUD, ANC and monitor VID and AUD flows

### IP Transmit - VID, AUD1-2, AUD3-4, ANC, MON Status

Protocol: 2110-20

Interface: Seamless E+F

Video Source: Generator - 1920x1080 p 60 YCbCr:422:10 BT709 SDR

Packet Read Schedule: Linear

Packing Mode: GPM Single Line

TR Offset: 0.000 µs

Displays the active settings for the selected flows

**NEW**

- The VID tab displays the active settings for the Video Generator: Protocol, Interface, Video Source, Packet Read Schedule, Packing Mode, TR Offset
- The AUD1-2, AUD3-4 tabs shows the active settings for the transmitted audio flows: Protocol, Packet Time, Channels, Audio Source
- The ANC tab displays the active settings for the Video Generator flows: Protocol, Interface, Packet Packing, Keep Alive, Timecode, TR Offset
- The MON tab displays the active settings for transmission of the Monitor flows: Protocol, Interface, Video Source, Packet Read Schedule, Audio Source, Packet Time, Channels,

### Transmission Configuration

Configure Generator/ Monitor Flows

Flow Enable/Disable


Configuration options

Summary of current configuration

**NEW**

- List of available flows in an expandable list
- Each minimized flow provides a single line summary of the current settings for information
- Configure the VID, AUD1, AUD2, AUD3, AUD4 Generator Flows
- Configure the VID MON, AUD MON Monitor flows
- 2110-20: Gapped/Linear Packet Read Schedule, BPM/GPM Packing Mode
- SDI/Egress Time Stamp, user control of TR Offset
- 2110-40 ANC, Keep Alive and ATC-LTC or ATC-VITC Timecode locked to PTP or Local Time

# Optional Toolsets



## Dolby® E Decoder and Metadata Analyzer [PHQXO-DOLBY]

The Dolby E Decoder and Metadata Analyzer option provides a clear and accessible view of the Dolby E metadata present in a selected Dolby E or ED2 audio stream. It also enables you to check the correct timing of Dolby E packets in the audio signal in an SDI or ST 2022-6 broadcast chain. You can check whether the Dolby E is created correctly and transferred transparently by network equipment such as routers, switchers, satellite links, etc. You can also choose to monitor the Dolby® audio from any of the SDI/2022-6 embedded audio, 2110-30/31 or AES inputs. The decoded output and downmix can be metered, monitored, Loudness measured, and routed to AES outputs.

### Dolby Metadata Analyzer

Source Pair/Channel of the Dolby Bitstream

Dolby Begin/End Gain Values for Each Source Signal

Program-dependant Metadata for Dolby E Program 1

Program-dependent Metadata for Dolby E Program 2

Analyser - Dolby Metadata E		Source AUD02 Ch 3-4		Frame Rate 25		Original Rate 25		Bit Depth 2		Errors	
Source	Timecode	01:02:53:04		Config	5.1+2						
L	C	Ls	L1	R		LFE		Rs			
Begin Gain	0.00dB	0.00dB	0.00dB	0.00dB		0.00dB		0.00dB			
End Gain	0.00dB	0.00dB	0.00dB	0.00dB		0.00dB		0.00dB			
Prog. Parameter	Value	Parameter	Value	Parameter	Value	Parameter	Value	Parameter	Value	Parameter	Value
1 Program 1											
Centre Level	-23.0dB	Channel Mode	2/2	Bitstream Mode		Complete Main		Film Standard			
Surround Downmix Level	-3.0dB	RF Mode	Compression	Line Mode	Compression	Line Mode	Compression	Line Standard			
Lo/Ro Centre Downmix Level	-3.0dB	Room Type	Small	Mixing Level		103dB					
Lo/Ro Surround Downmix Level	-3.0dB	Dolby Surround Mode	Not Surround	Preferred Stereo	Downmix	Not Indicated					
L/R Centre Downmix Level	-3.0dB	Dolby Surround Ex Mode	Not Surround EX	Data Rate							
L/R Surround Downmix Level	-3.0dB	Life Channel	True	RF Overmodulation	Protection	Disabled					
Lo/Ro Surround Downmix Level	-3.0dB	Copyright Bit	Yes	Original Bitstream		Yes					
Low Pass Filter	Enabled	AD Converter Type	Standard	DC Filter		Enabled					
Surround Phase Shift		LFE Low Pass Filter	Enabled	Surround 3db Attenuation		Disabled					
2 Program 2											
Dialogue Level	-23.0dB	Channel Mode	2/0	Bitstream Mode		Complete Main		Film Standard			
Centre Downmix Level	-3.0dB	RF Mode	Compression	Line Mode	Compression	Line Mode	Compression	Line Standard			
Surround Downmix Level	-3.0dB	Room Type	Small	Mixing Level		103dB					
Lo/Ro Centre Downmix Level	-3.0dB	Dolby Surround Mode	Not Indicated	Preferred Stereo	Downmix	Not Indicated					
Lo/Ro Surround Downmix Level	-3.0dB	Dolby Surround Ex Mode	Not Surround EX	Data Rate							
L/R Centre Downmix Level	-3.0dB	Life Channel	False	RF Overmodulation	Protection	Disabled					
L/R Surround Downmix Level	-3.0dB	Copyright Bit	Yes	Original Bitstream		Yes					
Audio Production Information	Yes	AD Converter Type	Standard	DC Filter		Enabled					
Low Pass Filter	Enabled	LFE Low Pass Filter	Disabled	Surround 3db Attenuation		Disabled					

- Displays the Dolby E metadata present in the selected Dolby E or ED2 audio stream
- Enables you to check the correct timing of embedded Dolby E and ED2 in SDI and 2022-6 payloads
- Check that the Dolby E metadata has been created correctly for multiple programs using the easy to read metadata display
- You can choose to monitor the Dolby audio from any of the SDI, 2022-6 or 2110 input embedded audio pairs/channels or the AES input
- Dolby stream CRC error detection and display

### Dolby Detection in Audio Metering


Group Pair Labels

Stereo Pair Selectors

Mono Channel Solo Bus Selectors

Detect any number of Dolby E, ED2, DD and DD+ pairs

Numeric values of each meter (dBFS)

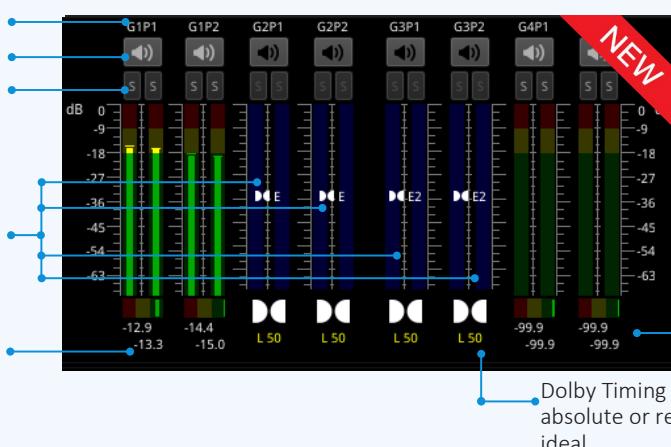

- Displays 16 audio meters together with peak level indicators and indication of audio pair correlation
- Dolby E, Dolby D and Dolby D+ streams are detected by the system with Dolby stream presence indicated in blue
- For an SDI or 2022-6 signal carrying embedded Dolby E audio, the Dolby E timing line number is also displayed below the detector, either as an absolute value or relative to the ideal line number specified for that video standard

Correlation indicator for each audio pair

Dolby Timing line number  
absolute or relative to  
ideal


### Dolby Decoder Metering and Status

8 channels automatically identified from Dolby program metadata

2 channels for 2.0 Stereo downmix of selected Dolby program

8 channel audio metering for Dolby E, and 2 channels for the Downmix

Dolby Decoder Panel and Status information

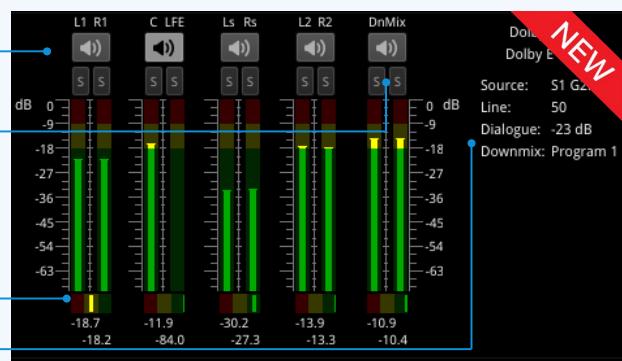

- When the Dolby E decoder is selected as the metering source (2110, SDI or 2022-6 mode), the view of the analyzer changes to display the 8 channels of decoded Dolby E audio as well as the stereo 2.0 downmix
- The meter channel identification is automatically configured from the Dolby program metadata
- Display of Dolby E source, line positioning (SDI, 2022-6), dialogue level and downmix program source

# Standard Toolset



## ST 2110 and ST 2022-6 Monitoring[PHQXO-IP-STND]

**THE CORE IP FEATURE SET, PROVIDED AS STANDARD IN BOTH THE QX AND QXL, OFFERS AN OPERATOR ALL OF THE ST 2110 CO**

The toolset supports simultaneous decapsulation of 1 video, 4\* audio and 1 ANC Data flow. Supported SMPTE protocols include ST 2059 (PTP) ST 2110-20 (Uncompressed Video), -30 (PCM Digital Audio), -31 (AES3 Transparent Transport) and -40 (ANC Data). ST 2022-7 seamless protection (SIPS) with AMWA NMOS IS-04, IS-05 and PTP system resource, is provided over two media network interfaces using industry standard optical ethernet SFPs. Audio handling conforms to ST 2110-30 Class C with support for 48kHz streams from 1 to 10 channels at packet times of 1ms and 1 to 80 channels at packet times of 125us.

Also provided is an indication of the timing relationship of each of the eight ST 2022-7 flows to PTP with status information, as well as a ST 2022-7 status tool that reports the health and relative timing skew of each ST 2022-7 pair all with hardware time stamping.

SMPT 2110 & 2022-6

SFP IP Network		IGMP: Max V3
SFP E	SFP F	
Carrier Signal	Present	Present
Interface	Up	Up
MAC Addr	00:1F:7F:01:56:78	00:1F:7F:02:56:78
IP Addressing Mode	Dynamic	Dynamic
IP Addr	192.168.10.147 / 24	192.168.20.15 / 24
Gateway	192.168.10.254	192.168.20.254
DNS IP Addr	192.168.10.254	192.168.20.254
Total Tx pkts	40164547451	40161328222
Total Rx pkts	322592374382	11620037
SFP E :		
SFP F :		

### SFP IP Network

- Reporting of presence of SFPs, SFP MAC and IP addresses (flow source IP address), and interface status
- Tx and Rx packet counters for indication of traffic activity
- User configuration of SFP IP Addresses, Masks, Gateway and DNS addresses

SFP A - Info		Temperature: 35.7 °C	Voltage: 3.22 V
		Rx Power: -4.18 dBm	Tx Power: -2.97 dBm
Status	Approved		
Vendor	Gigalight		
Part No	GPP-85192-SRC		
Vendor OUI	24-00-00		
Revision	1.0		
Serial No	M1901180211		
Identifier	SFP or SFP+		
Ext Identifier	GBIC/SFP function via two-wire only		
Connector Type	LC		
Encoding	64B/66B		

### SFP Information


- SFP status information for monitoring the physical network connection
- Indication of SFP vendor and laser characteristics
- RX and TX power for debug of fibre connectivity

IP Receive - Flow Select							
Multicast Requests: 16/16 joins sent							
SFP	Sel	Protocol	Type	Dst IP	Src IP	SSRC	Analyzer Interface: SFP A
A	2110-00		96	239.141.26.1/20000	192.168.50.141/100000	0	1.091 Gbps 87015986M
A	2110-00		96	239.141.26.1/20000	192.168.50.141/100000	0	1.091 Gbps 87015986M
A	2110-00		97	239.141.30.1/20000	192.168.50.141/100000	0	21.88 Mbps 645007799
A	2110-00		97	239.168.161.20/20000	192.168.50.108/100000	0	21.88 Mbps 20919398
A	2110-00		97	239.168.30.3/20000	192.168.10.108/100000	0	2.75 Mbps 20319951
A	2110-00		97	239.168.30.3/20000	192.168.10.108/100000	0	2.75 Mbps 20319951
A	2110-00		98	239.168.40.1/20000	192.168.10.108/100000	0	43.371 kbps 1979376
A	2110-00		98	239.168.40.1/20000	192.168.10.108/100000	0	43.371 kbps 1979376
B	2110-00		96	239.141.20.2/20000	192.168.10.141/100000	0	1.091 Gbps 870122099
B	2110-00		96	239.141.20.2/20000	192.168.10.141/100000	0	1.091 Gbps 870122099
B	2110-00		97	239.141.30.2/20000	192.168.10.141/100000	0	21.88 Mbps 644978435
B	2110-00		97	239.168.30.3/20000	192.168.10.108/100000	0	21.88 Mbps 229193939
B	2110-00		97	239.168.30.3/20000	192.168.10.108/100000	0	2.75 Mbps 26319951
B	2110-00		98	239.168.40.1/20000	192.168.10.108/100000	0	43.371 kbps 1979376
B	2110-00		98	239.168.40.1/20000	192.168.10.108/100000	0	43.371 kbps 1979376

### IP Receive

- Reporting of the IP Flows available to the receiver and user selection of the required flows
- Indication of Qx locked status, Protocol, Src and Dst IP and Port Numbers, SSRC, Packet Counts, Sequence, payload and CRC errors
- Configuration of Multicast Destination IP addresses and subsequent Multicast Join requests

SFP A - PTP Info		Standby System Reference
GM Info	Qx Status	Messaging
Communication Mode	Multicast (M/M)	Appl freq adjustment
Delay Req Interval	Using GM value	Appl freq adj delta
Announce Rect Grace Period	3	Offset from Master
Latency Offset	0 ns	
Local PTP State	Listening	Steps removed

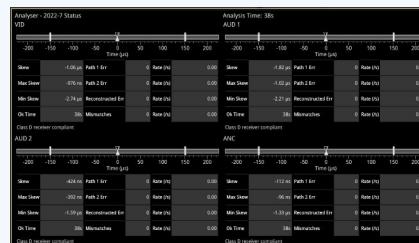


### ST 2110 PTP Info - 2 port

- Control of PTP domain and communication mode (multicast, hybrid w/o negotiation)
- Indication of lock status
- Grandmaster information including leader ID and time source
- Indication of estimated frequency and phase lock offsets
- Indication of one step or two step traffic
- Two independent PTP followers

### ST 2022-7 Status

- Indication of the health of ST 2022-7 seamless protection
- Warning of ST 2022-7 flow-pair mis-match
- Warnings of errors on flows and errors on reconstructed output and error rates/second
- Relative measure of Path Differential of flows on SFPB (Blue Network) relative to SFPA (Amber Network)
- Class A, B, C, D markers

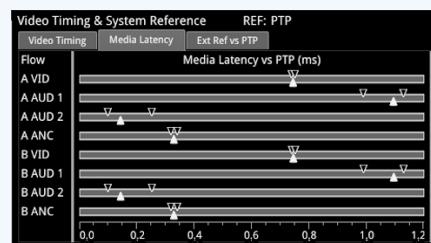

### IP Flow Latency

- Indication of media latency
- Indication of relative timing of audio and ANC flows wrt video
- Indication of relationship of underlying media to PTP
- External analog reference timing wrt PTP

# Standard Toolset



## AMWA NMOS

A suite of AMWA NMOS tools that provide flexibility when integrating with an NMOS controller and associate network Topology. Supported protocols: IS-04 v1.0, 1.1, 1.2, 1.3 IS-05 1.02, 1.1 and IS-09 PTP domain. Provision of both in-band and out-of-band control topologies with manual, mDNS, DNS-SD and DHCP. Senders and Receivers can be independently configured as single or dual NMOS end points. NMOS troubleshooting is aided by the simultaneous views of the state of both the Sender and Receiver Master and RTP Enables, SDP, and the IS-05 parameters. The receiver auto-detected video format and audio packet time and channel count are compared with the received SDP information for diagnosis of the format information supplied by the SDP record.

NMOS Receivers - SDP - Active		NMOS Enabled			54:8010
	VID	AUD 1	AUD 2		NEW
SFP E-F	Master Enable	✓	✓	✓	✓
	RTP 1 Enabled	✓	✓	✓	✓
	RTP 2 Enabled	✓	✓	✓	✓
	SDP Present	✓	✓	✓	✓

## NMOS Receiver Status

- Qx/QxL at a glance overview of the state of the receiver Master Enable, RTP Enables and SDP records for each media interface
- Available in 1/16 view - toggles with the SDP view
- Display of the Master, RTP and SDP of all Receiver flows

NMOS Receiver SDP

- Qx/QxL display of the active receiver SDP record
- User configurable colour highlighting for improved readability
- Display adapts with NMOS Dual or Single receiver configuration (Dual shown)

NMOS Receivers - IS05 - Active					NMOS Enabled	54:8010
SFP E+	VID	AUD 1	AUD 2	ANC	NEW	
key						
activation						
activation_time	1642421872:378453365					
mode	activate_immediate					
requested_time	1642421872:35738466					
maxableable	true					
sender_id	840c28a0-0952-5782-88f7-766a7880218a					
transport_file						
transport_params						
destination_port	5178					
interface_ip	192.168.10.147					
multicast_ip	239.9.20.1					
rtp_enabled	true					
source_ip	192.168.10.125					

NMOS Receiver IS-05

- Qx/QxL display of the active receiver IS-05 parameters
- Individual tabs for the display of the IS-05 parameters for each receiver flows
- Human readable tree view of the IS-05 JSON with expand/collapse for rapid navigation
- Display adapts with NMOS Dual or Single receiver configuration (Dual shown)

NMOS Sender Status

- QxL, at a glance overview of the state of the Sender Master Enable, RTP Enables and SDP records for each media interface
- Available in 1/16 view - toggles with the SDP view
- Display of the Master, RTP and SDP of all Generator flows
- Display of the Master, RTP and SDP status of all monitor GUI Interface flows

NMOS Sender SDP

- QXL display of the active sender SDP record
- User configurable colour highlighting for improved readability
- Display adapts with NMOS Dual or Single receiver configuration (Single shown)

NMOS Senders - IS05 - Active							NMOS Enabled	54/8010
SFP E	VID	AUD 1	AUD 2	AUD 3	AUD 4	ANC	VLM	VIDMOI 4
key	value							NEW
activation								
activation_time	1641995897.254319371							
mode	activate_immediate							
requested_time								
master_enable	true							
key	value							
activation								
activation_time	1641995897.355052629							
mode	activate_immediate							
requested_time								
master_enable	true							

NMOS Sender IS-05

- Qx/QxL display of the active sender IS-05 parameters
- Individual tabs for the display of the IS-05 parameters for each generator and GUI sender flows
- Human readable tree view of the IS-05 JSON with expand/collapse for rapid nav
- Display adapts with NMOS Dual or Single receiver configuration (Single shown)

NMOS	
NMOS Node	Enabled
DNS Search Domain	nmos.tv
Operating mode	Registered
Registration Discovery	Manual
Registration URL	<a href="http://192.168.10.254:8010/x-nmos/registration">http://192.168.10.254:8010/x-nmos/registration</a>
Receiver mode	Dual interface
Sender mode	Single interface
Configure with IS-09	Disabled

Analyser - 2110 Format Setup		Analyser - SFP	
VID	AUD	NEW	
Picture Dimensions	Auto	SDP	Overl.
3840x2160	3840x2160	3840x2160	3840x2160
Frame Packing	Progressive	Progressive	Progressive
Frame Rate	50	50	60
Colour Format	YCbCr	YCbCr	RGB
Sampling	422	422	444
Bit Depth	10	10	8
Transfer Curve	SDR	SDR	SDR
Colourimetry	BT709	BT709	BT709
3840x2160 p 50 YCbCr:422:10 BT709 SDR	TRO Default: 764.444 ps		

## NMOS Setup

- Manual, mDNS or DNS-SD discovery of the Registry with DHCP
- Status reporting of registration and DNS domain
- Independent configuration of sender and receiver as single or dual NMOS endpoints
- NMOS node Enable/Disable
- IS-09 PTP Domain Enable/Disable

## 2110 Format Setup



- At a glance comparison of auto-detected, SDP and manual format settings
- User-configurable video format parameters for ST 2110-20 flows
- User-configurable audio format parameters for ST 2110-30/31 flows includes packet time and channel count
- Automatic detection of audio format, channel count and packet time

# Optional Toolsets




## 10G/25G PCAP Tool [PHQXO-IP-PCAP]

This Packet Capture (PCAP) tool provides a flexible range of options for your capture of the live IP traffic on either a single or both Media interfaces while in 2110 Mode. The PCAP data is then saved to USB memory stick for offline analysis using third-party network analysis tools. The PCAP data on the USB stick can be accessed remotely via Web Browser.

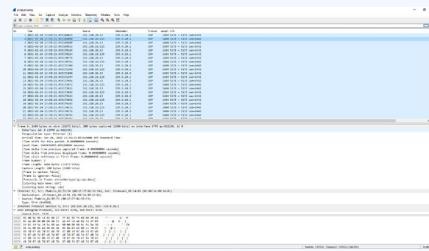
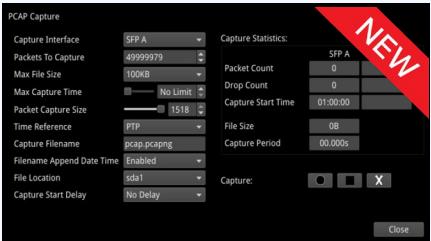


- Full line-rate capture at 25Gbps on a single interface, back-to-back packets
- Capture data on one or both media interfaces simultaneously
- User control of packet capture size - e.g. Full payload or headers only with user control of the Packet Capture size (12-1518 Octets)
- Manual Start-Stop, Auto Start-Stop at specified time, Capture Start Delay
- User controls for auto stop: No of Packets, File size, Duration
- Saves to USB stick with the option of Browser File transfer off the unit
- 4GB PCAP max. file size on QxL (1GB on Qx)

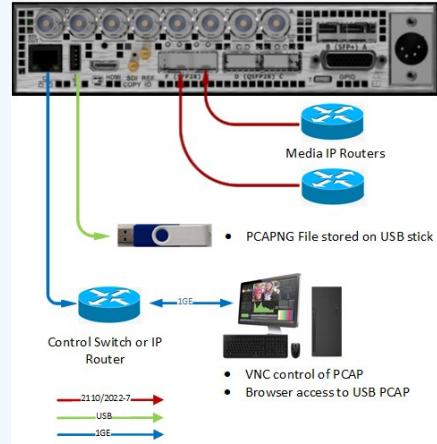

## IP Network Traffic Measurement [PHQXO-IP-MEAS]

An advanced engineering suite of tools for ST 2110 analysis and debug offers the provision of up to four simultaneous dual Packet Interval Timing measurement windows per input for easy visualization of network congestion and sender packet distribution with max, mean and min inter-packet arrival times. Also included is detailed data reporting of flow packet, clock rates and PTP timing relationship, as well as the measurements of the ST 2110-21 Network Compatibility model (C<sub>INST</sub>) and Virtual Receiver Buffer Model (VRX). Advanced measurement of IP flow latency and RTP clock timing relationships for debug of Audio, Video and ANC alignment, source PTP and encapsulation are featured.

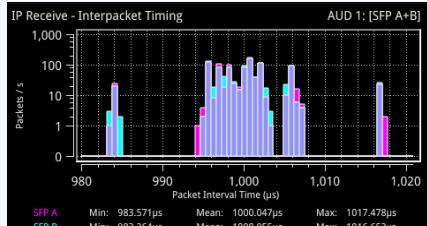
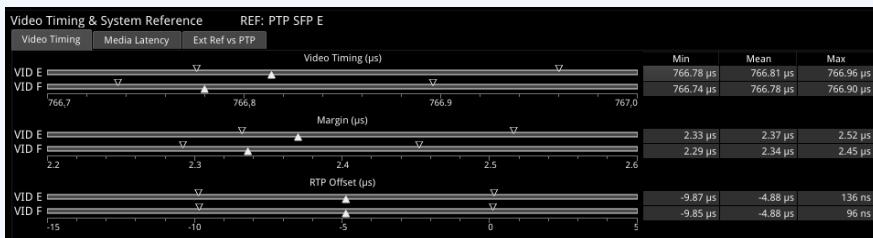


## Advanced Media Timing - Video

- Time of First Received Packet of a Frame (video timing)
- Receiver Buffer Margin wrt TROdefault
- Sender RTP offset

## Inter-packet Timing

- Stream health reporting using histogram to show the distribution of inter-packet arrival times
- Simultaneous reporting of ST 2022-7 primary and secondary flow
- Packet counts (log or linear scales) mapped against arrival times (μs)
- Easy diagnosis of congestion with max, mean and min inter-packet arrival times

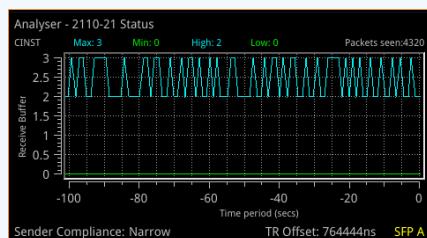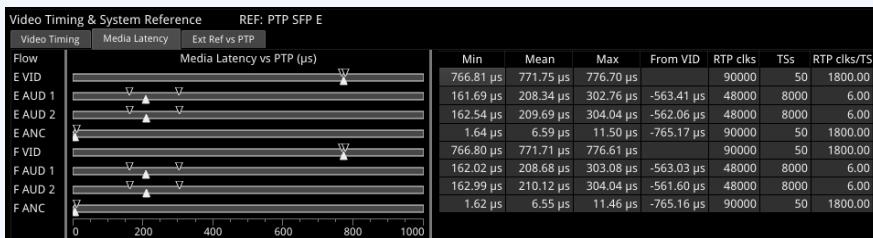

## ST 2110-21

- ST 2110-21 measurement of Network Compatibility Model (C<sub>INST</sub>) and Virtual Receiver Buffer Model (VRX)
- User control of VRX buffer read-schedule timing
- User control of C<sub>INST</sub> buffer drain rate

## Advanced Media Timing - Media Latency

- Numerical display of Mean, Min and Max latency measurements
- Measured RTP clocks/s, Timestamps/s and RTP clocks/timestamp interval
- Numerical display of Video to Audio and ANC relative latency measurement


# Optional Toolsets



## Packet Interval Profile Generator

[PHQXO-IP-NGT] Requires PHQXO-GEN)

A ST 2022-6 packet generation tool for evaluating the ability of a receiver to handle a ST 2022-6 flow with jitter. Simulate IP video network packet jitter under a variety of network conditions by providing the ability to adjust the transmission distribution profile. View the interval timing distribution of the packets being generated, the number of packets being generated each second, against the deviation of each packet interval from the expected interval time.

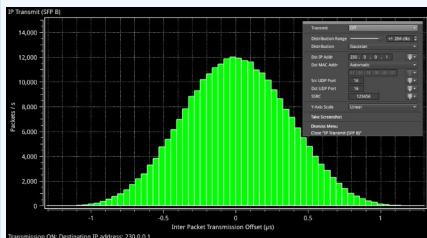

## IP Transmit (ST 2022-6)

- Configuration of Transmission flow addresses, port numbers and SSRC
- Inter-packet jitter onto outgoing flow
- Gaussian or uniform distribution
- Flow control on/off

## 4K/UHD ST 2110 Extended Format Support [QxL Only]

[PHQXO-EUHD] Requires PHQXO-UHD)

Out of the box the QxL supports YCbCr 4:2:2 and YCbCr/RGB 444 formats in 2110-20 up to a max payload of approx 12Gbps. If you are working with Extended Reality (xR), fixed installation LED walls and Graphics Card applications, then the PHQXO-EUHD option provides support for Analysis and Generation\* of UHD/4K YCbCr/RGB 444 formats in the range 47.95P – 60P.

Generate - Video | Audio

Resolution	Frame	Mapping	HLG
4096x2160	All	YCbCr4:2:2:10	All
4096x2160	60p	YCbCr4:2:2:10	HLG 2020
4096x2160	59.94p	YCbCr4:2:2:12	HLG 2020
4096x2160	50p	YCbCr4:4:4:10	HLG 2020
4096x2160	48p	YCbCr4:4:4:12	HLG 2020
4096x2160	47.95p	RGB:12	HLG 2020
4096x2160	30p	YCbCr4:2:2:10	HLG 2020
4096x2160	29.97p	YCbCr4:2:2:10	HLG 2020
4096x2160	25p	YCbCr4:2:2:10	HLG 2020
4096x2160	24p	YCbCr4:2:2:10	HLG 2020
4096x2160	23.98p	YCbCr4:2:2:10	HLG 2020

NEW

## EUHD Format Support




- Analysis of 2110-20 flows at UHD/4K 444 (RGB/YCbCr) 8/10/12 bit 47.95P-60P
- 4K60P RGB:12 Mean bandwidth approx. 20Gbps (equivalent to a peak bandwidth of around 21Gbps for a gapped flow)

## High Dynamic Range (HDR) visualization & analysis toolset [PHQXO-HDR]

The Qx Series' comprehensive HDR toolset includes a signal generator, CIE chart, Luma false color highlighting or "heat map", waveform monitor and vectorscope. All the main live production SDR and HDR formats are supported: Standard Dynamic Range (SDR) BT.709, BT.2020 as well as HDR BT.2110 HLG, PQ and Sony S-Log3 and SR Live. The Waveform provides a Cd/m<sup>2</sup> (nits) graticule along with BT.2048 diffuse white markers. The flexible user controlled HDR heatmap offers 7 simultaneous programmable color overlay bands with presets for HDR and SDR ranges, plus a user custom preset. The CIE 1931 xy display provides overlays for BT.709, BT.2020 and ST.2086 gamut (P3) to enhance the visualization and analysis of your HDR/WCG content.

### HDR Generator

An extensive set of test patterns include BT.2111 HDR color bars for HLG, PQ and SR Live as well as a full set of SDR 709 patterns mapped via 'display light' to each of the four HDR formats for line checks, comparative monitor set-up and the evaluation of HDR to SDR converters.

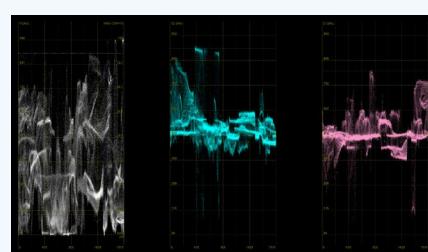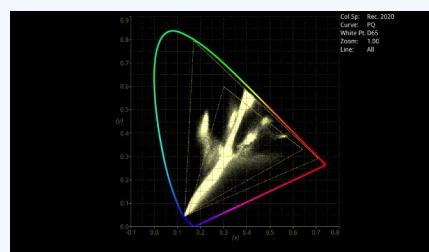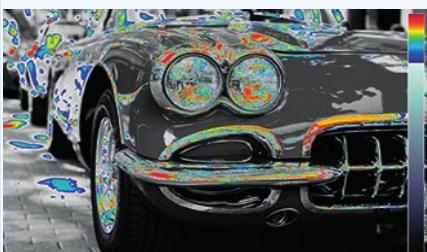

### False Color Highlighting

- Programmable 'Heat Map' to highlight luminance zones providing quick identification of shadows, skin or mid-tones or specular highlights
- 7 simultaneous programmable color overlay bands
- Presets for HDR and SDR ranges plus user custom

### Analyzer - CIE Chart

- CIE 1931 xy display
- Single line mode linked to picture cursor
- Pan and zoom
- ITU-R BT. 709, BT. 2020 and ST 2086 gamut overlays
- Tooltip co-ordinate display
- Support for BT. 1886, BT. 2100 HLG and PQ, Sony S-Log3, SR Live

### HDR Waveform

- Waveform HDR graticules with Nits (Cd/m<sup>2</sup>)
- BT. 2408 diffuse white markers
- Support for BT. 1886, BT. 2100 HLG and PQ, Sony S-Log3, SR Live

\* Upcoming software release

# Specifications



## Formats supported (Generation, Analysis & Monitoring)

IP SMPTE 2110/2022-7 over 10G IP	●	●
IP SMPTE 2022-6 over 10G IP	●	●
IP SMPTE 2110/2022-7/2022-6 over 25G IP	-	●
3G/1.5G HD Formats	●	Factory Option
12G/6G/3G/1.5G-SDI UHD Formats	○	Factory Option
SDI Eye and Jitter Physical Layer Analysis	Factory Option	Factory Option
UHD over 25G IP	-	○

## Hardware and Software Options Supported

Audio/Video Generator (SDI, ST 2022-6, ST 2110)	○ (SDI/2022-6)	○ (SDI, 2022-6, 2110)
Eye and Jitter Toolset (Hardware Option)	○	○
UHD/4K Upgrade	○ (SDI)	○ (SDI, 2110)
SDI-STRESS Testing Toolset	○	○
Data View Analyzer with ANC Inspector	●	●
HDR/WCG Support	○	○
Dolby E Analysis	○	○
IP ST 2022-6 Decap, ST 2110-20/30/31/40 Decap with ST 2022-7 and Dual PTP	●	●
IP Network Traffic Measurement Toolset (ST 2110)	○	○
IP Network Traffic Generation Toolset (ST 2022-6)	○	○
IP Network Traffic Generation Toolset (ST 2110)	-	○
PCAP	○	○
EUHD Formats over 25G 2110-20	-	○

## Video inputs / outputs

4 x SDI inputs, HD/3G, 75 Ohm terminated BNC	●	Factory Option
2 x SFP+ MSA/NON-MSA cages (supports 12Gbps copper or fiber SDI interfaces)	●	Factory Option
4 x SDI outputs, HD/3G, 75 Ohm BNC	●	Factory Option
Support for 6G/12G SDI I/O	○	Factory Option
RTE™ Real-Time Eye input (12G/6G/3G/HD-SDI) x 1 (SDI input A) BNC	Factory Option	Factory Option

## Ethernet IP inputs/outputs (accepts generic SFPs)

2 x SFP+ 10G Cages (also supports MSA/NON-MSA 12Gbps copper or fiber SDI SFPs)	●	-
2 x SFP28 10/25G cages	-	●
2 x QSFP28 10/25/40/50/100G cages (For Future Functionality)	-	○

## Audio inputs/outputs

4 x 75 Ohm AES selectable I/O (26 pin high density 'D' Type socket)	●	●
1 x Stereo analog audio output (26 pin high density 'D' Type socket)	●	●
8 channel 48kHz PCM audio on HDMI and SDI Instrument output	●	●

## User interface

HDMI instrument output, 1920 x 1080, 4:4:4 RGB, Type A	HDMI 1.4	HDMI 2.0b
SDI 3Gbit instrument out, 1920 x 1080, 4:2:2 YCbCr	BNC	Micro BNC
ST 2110-20, ST 2110-30 instrument out, 1920 x 1080, 4:2:2 YCbCr	-	●

## Reference

2 x 75 Ohm BNC high impedance looping reference input, tri-level or B&B with cross lock	●	-
1 x 75 Ohm Micro-BNC terminating ref input, Tri/B&B with cross lock	-	●

## Networking & control

10/100/1000 BASE-T	●	●
8 x bi-directional GPI (26 pin high density 'D' Type socket)	●	●

## Monitoring

Internal Beeper	●	●
-----------------	---	---

## Form factor

Size (Width x Height x Depth - excluding projections)	253 x 44 x 211 mm	253 x 44 x 211 mm
Weight	1.9 kg	1.9 kg

## Electrical


Power consumption	50W typical, 70W max	100W typical, 120W max
4 Pin XLR power connector	12V nominal (10V-18V)	12V nominal (10V-18V)
AC Power adapter	90-264VAC, 120W	90-264VAC, 120W

## Warranty


Warranty (1 year)	●	●
Extended Warranty Package (3 - 5 years)	○	○

● Standard  
○ Optional

## Qx Rear panel

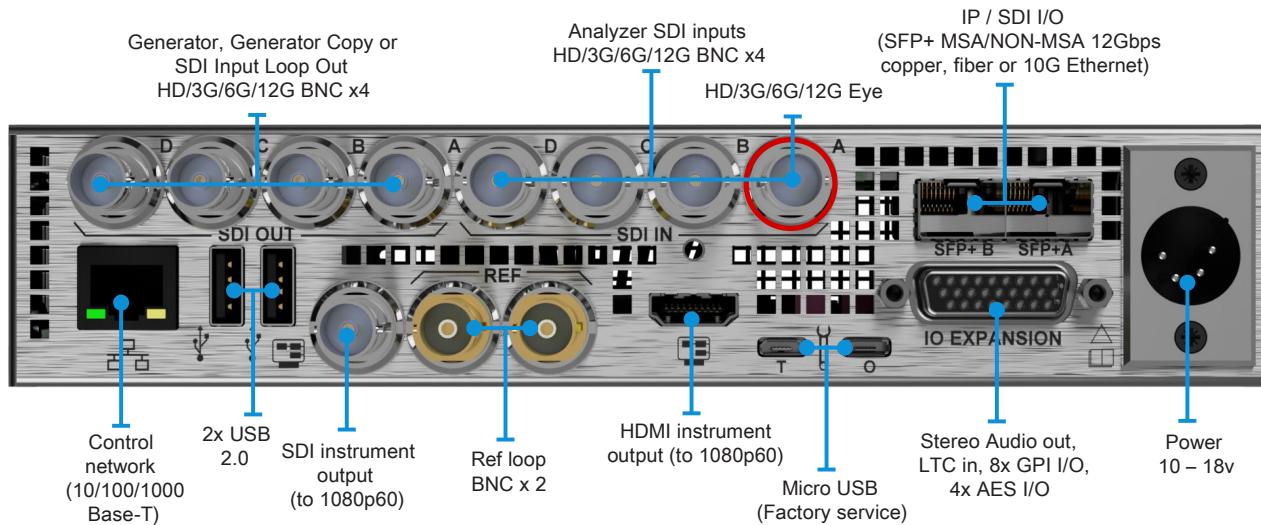


## Qx/QxL Mezzanine Interface Card Block Diagram

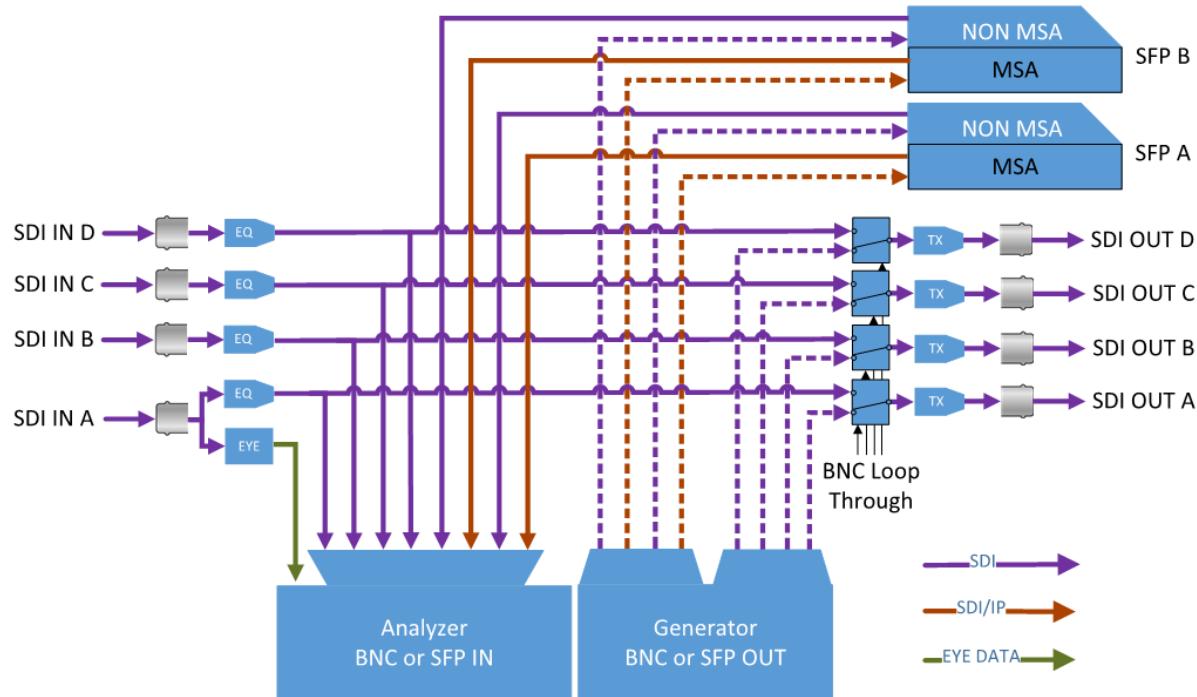


# QxL Rear Panel

## QxL - IP Only

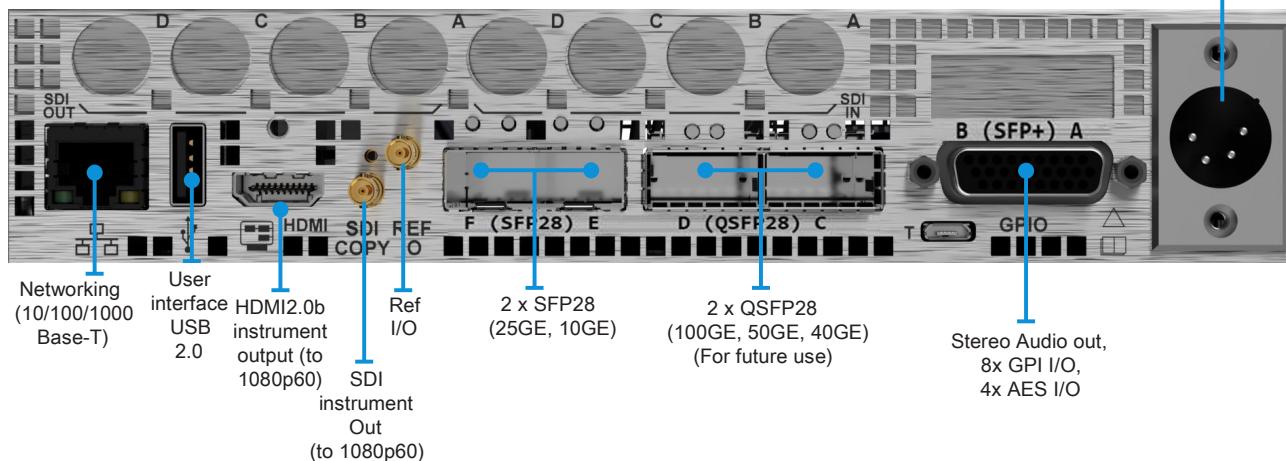

## QxL with factory fitted SDI option

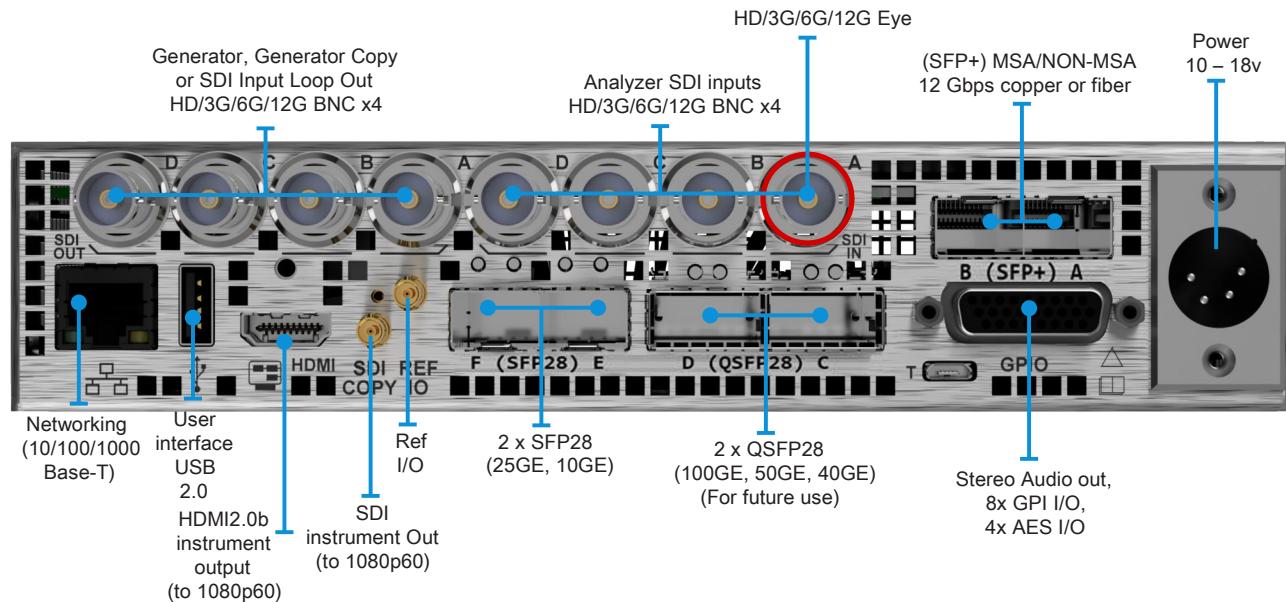

# Ordering Qx

## Qx Chassis

PHQX01-3G	Qx 1U ½ rack HD/2K SDI/10GbE IP Rasterizer, Analyzer only [now includes PHQXO-IP-STND]
PHQX01E-3G	Qx 1U ½ rack HD/2K SDI10GbE IP Rasterizer with Eye & Jitter, Analyzer only [now includes PHQXO-IP-STND]

## Qx SDI Software Options

PHQXO-UHD	UHD/4K SDI license for PHQX01-3G or PHQX01E-3G (includes HD/2K extended mode formats)
PHQXO-SDI-STRESS	Advanced 12G-SDI Stress Testing Toolset (requires PHQX01E-3G, PHQXO-UHD and PHQXO-GEN)
PHSFP-RT12-1310	SFP+ optical SDI transceiver 12G/6G/3G/HD-SDI

## Qx SDI/IP Software Options

PHQXO-GEN	Audio/Video Test Signal Generator - SDI, ST 2022-6 (PHQXO-IP-STND required for ST 2022-6 TSG operation)
PHQXO-HDR	HDR/WCG support, CIE 1931 chart, HDR Heatmap
PHQXO-DOLBY	Dolby E Decoder plus Metadata Analyzer

## Qx IP Options

PHQXO-IP-MEAS	IP Network Traffic Analysis Toolset (requires PHQXO-IP-STND)
PHQXO-IP-PCAP	10G (up to 1GB) PCAP tool
PHQXO-IP-NGT	ST 2022-6 IP Network traffic Generation Toolset (requires PHQXO-IP-STND, PHQXO-GEN)
PHSFP-10GE-SR	10GBASE-SR Ethernet short range SFP+ 850nm, 300m, multi-mode transceiver
PHSFP-10GE-LR	10GBASE-LR Ethernet long range SFP+ 1310nm, 10km, single mode transceiver

## Qx Fitting Kits

PHQXC-1	12G-SDI Test Cable 1m
PHQXK1	Qx 19" rack mount kit (1x Qx chassis)
PHQXK2	Qx 19" rack mount kit (2x Qx chassis)
PHQXK3	Qx Mounting kit – 9.5" rack (1x Qx chassis)

## Qx Extended Warranty

PHQX-3YEAR	3 Year Warranty**
PHQX-5YEAR	5 Year Warranty**

# Ordering QxL

## QxL Chassis

PHQXL	QxL 1U ½ rack HD/2K 25GbE IP Rasterizer, Analyzer only [now includes PHQXO-IP-25G]
PHQXL01-3G	QxL 1U ½ rack HD/2K 25GbE IP/SDI Rasterizer, Analyzer only [now includes PHQXO-IP-25G]
PHQXL01E-3G	QxL 1U ½ rack HD/2K 25GbE IP/SDI Rasterizer with Eye & Jitter, Analyzer only [now includes PHQXO-IP-25G]

## QxL SDI Software Options

PHQXO-SDI-STRESS	Advanced 12G-SDI Stress Testing Toolset (requires PHQXL01E-3G, PHQXO-UHD and PHQXO-GEN)
PHSFP-RT12-1310	SFP+ optical SDI transceiver 12G/6G/3G/HD-SDI

## QxL SDI/IP Software Options

PHQXO-UHD	UHD/4K formats for both IP and SDI (includes HD/2K extended mode formats)
PHQXO-GEN	Audio/Video Test Signal Generator - SDI, ST 2022-6, ST 2110 (PHQXL01-3G, PHQXL01E-3G required for SDI operation)
PHQXO-HDR	HDR/WCG support, CIE 1931 chart, HDR Heatmap
PHQXO-DOLBY	Dolby E Decoder plus Metadata Analyzer

## QxL IP Options

PHQXO-IP-MEAS	IP Network Traffic Analysis Toolset
PHQXO-IP-PCAP	10G/25G (up to 4GB) PCAP tool
PHQXO-IP-NGT	ST 2022-6 IP Network traffic Generation Toolset (requires PHQXO-GEN)
PHQXO-EUHD	Extended UHD formats for ST 2110 IP Only (requires PHQXO-UHD)
PHSFP-10GE-SR	10GBASE-SR Ethernet short range SFP+ 850nm, 300m, multi-mode transceiver
PHSFP-10GE-LR	10GBASE-LR Ethernet long range SFP+ 1310nm, 10km, single mode transceiver
PHSFP-25GE-SR	25GBASE-SR Ethernet short range SFP28 850nm, 100m, multi-mode transceiver
PHSFP-25GE-LR	25GBASE-LR Ethernet long range SFP28 1310nm, 10km, single mode transceiver

## QxL Fitting Kits

PHQXC-1	12G-SDI Test Cable 1m
PHQXK1	Qx 19" rack mount kit (1x Qx chassis)
PHQXK2	Qx 19" rack mount kit (2x Qx chassis)
PHQXK3	Qx Mounting kit – 9.5" rack (1x Qx chassis)

## QxL Extended Warranty

PHQXL-3YEAR	3 Year Warranty**
PHQXL-5YEAR	5 Year Warranty**

\*\* One year warranty included as standard

# SDI SFP Interfaces

SDI SFP Interface	Link Type	SFP+B Link Rates		SFP+A Link Rates	
<b>SDI TRANSCEIVERS ONLY</b>					
One SDI Transceiver in Cage <b>A</b>	SFP Interface	N/A	N/A	<b>RX CH1</b>	<b>TX CH1</b>
	Single Link: Rx/Tx	N/A	N/A	<b>BNC A RX</b> 1.5/3/6/12	<b>BNC A TX</b> 1.5/3/6/12
	Dual Link: N/A	N/A	N/A	N/A	N/A
	Quad Link: N/A	N/A	N/A	N/A	N/A
Two SDI Transceivers in Cages <b>A &amp; B</b>	SFP Interface	<b>RX CH1</b>	<b>TX CH1</b>	<b>RX CH1</b>	<b>TX CH1</b>
	Single Link: <b>RX/TX</b>	N/A	<b>BNC C TX</b> (Tx Copy) 1.5/3/6/12	<b>BNC A RX</b> 1.5/3/6/12	<b>BNC A TX</b> 1.5/3/6/12
	Dual Link: <b>RX/TX</b>	<b>BNC C RX</b> 1.5/3/6	<b>BNC C TX</b> 1.5/3/6	<b>BNC A RX</b> 1.5/3/6	<b>BNC A TX</b> 1.5/3/6
	Quad Link: N/A	N/A	N/A	N/A	N/A
<b>SDI DUAL RECEIVERS ONLY</b>					
One SDI Dual Receiver in Cage <b>A</b>	SFP Interface	N/A	N/A	<b>RX CH1</b>	<b>RX CH2</b>
	Single Link: <b>RX</b>	N/A	N/A	<b>BNC A RX</b> 1.5/3/6/12	N/A
	Dual Link: <b>RX</b>	N/A	N/A	<b>BNC A RX</b> 1.5/3/6	<b>BNC B RX</b> 1.5/3/6
	Quad Link: N/A	N/A	N/A	N/A	N/A
Two SDI Dual Receivers in Cages <b>A &amp; B</b>	SFP Interface	<b>RX CH1</b>	<b>RX CH2</b>	<b>RX CH1</b>	<b>RX CH2</b>
	Single Link: <b>RX</b>	N/A	N/A	<b>BNC A RX</b> 1.5/3/6/12	N/A
	Dual Link: <b>RX</b>	N/A	N/A	<b>BNC A RX</b> 1.5/3/6	<b>BNC B RX</b> 1.5/3/6
	Quad Link: <b>RX 1 2</b>	<b>BNC C RX</b> 1.5/3	<b>BNC D RX</b> 1.5/3	<b>BNC A RX</b> 1.5/3	<b>BNC B RX</b> 1.5/3
<b>SDI DUAL TRANSMITTERS ONLY</b>					
One SDI Dual Transmitter in Cage <b>A</b>	SFP Interface	N/A	N/A	<b>TX CH2</b>	<b>TX CH1</b>
	Single Link: <b>TX</b>	N/A	N/A	<b>BNC B TX</b> (Tx Copy) 1.5/3/6	<b>BNC A TX</b> 1.5/3/6/12
	Dual Link: <b>TX</b>	N/A	N/A	<b>BNC B TX</b> 1.5/3/6	<b>BNC A TX</b> 1.5/3/6
	Quad Link: N/A	N/A	N/A	N/A	N/A
Two SDI Dual Transmitters in Cages <b>A &amp; B</b>	SFP Interface	<b>TX CH2</b>	<b>TX CH1</b>	<b>TX CH2</b>	<b>TX CH1</b>
	Single Link: <b>TX</b>	<b>BNC D TX</b> (Tx Copy) 1.5/3/6	<b>BNC C TX</b> (Tx Copy) 1.5/3/6/12	<b>BNC B TX</b> (Tx Copy) 1.5/3/6	<b>BNC A TX</b> 1.5/3/6/12
	Dual Link: <b>TX</b>	<b>BNC D TX</b> (Tx Copy) 1.5/3/6	<b>BNC C TX</b> (Tx Copy) 1.5/3/6	<b>BNC B TX</b> 1.5/3/6	<b>BNC A TX</b> 1.5/3/6
	Quad Link: <b>TX 2 3</b>	<b>BNC D TX</b> 1.5/3	<b>BNC C TX</b> 1.5/3	<b>BNC B TX</b> 1.5/3	<b>BNC A TX</b> 1.5/3
<b>SDI DUAL TRANSMITTER PLUS SDI DUAL RECEIVER</b>					
One SDI Dual Transmitter <b>(CAGE A)</b> and One Dual SDI Receiver <b>(CAGE B)</b>	SFP Interface	<b>RX CH1</b>	<b>RX CH2</b>	<b>TX CH2</b>	<b>TX CH1</b>
	Single Link: <b>RX/TX</b>	<b>BNC C RX</b> 1.5/3/6/12	N/A	<b>BNC B TX</b> (Tx Copy) 1.5/3/6	<b>BNC A TX</b> 1.5/3/6/12
	Dual Link: <b>RX/TX</b>	<b>BNC C RX</b> 1.5/3/6	<b>BNC D RX</b> 1.5/3/6	<b>BNC B TX</b> 1.5/3/6	<b>BNC A TX</b> 1.5/3/6
	Quad Link: N/A	N/A	N/A	N/A	N/A

1 In quad link 2SI the Receivers will auto adapt to any order of sub-image to BNC mapping.

2 In quad link square division the sub image order is: BNC A:TL, BNC B:TR, BNC C:BL, BNC D:BR.

3 In quad link 2SI the sub image order is: BNC A:Sub 1, BNC B:Sub 2, BNC C:Sub 3, BNC D:Sub 4.

# Supported 2K/HD SDI Formats [Qx & QxL]

The following SDI formats are standard on Qx and QxL.

SMPTE Stnd. Link (Content)	Interface	Resolution	Sampling Structure	Pixel Depth	Frame/Field Rate	HDR	SDI	2022-6
ST 292 (ST 296)	HD	1280 x 720	4:2:2 (YCbCr)	10	60p, 59.94p, 50p, 30p, 29.97p, 25p, 60i, 59.94i, 50i 30p, 29.97p, 25p, 24p, 23.98p	○●	●	●
ST 292 (ST 274)	HD	1920 x 1080	4:2:2 (YCbCr)	10	30psF, 29.97PsF, 25PsF, 24PsF, 23.98PsF	○●	●	●
ST 292 (RP 211)	HD	1920 x 1080	4:2:2 (YCbCr)	10	30p, 29.97p, 25p, 24p, 23.98p, 30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF	○●	●	●
ST 292 (ST 2048-2)	HD	2048 x 1080	4:2:2 (YCbCr)	10	30p, 29.97p, 25p, 24p, 23.98p, 30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF	○●	●	●
ST 372 (ST 274)	Dual Link HD	1920 x 1080	4:2:2 (YCbCr)	10	60p, 59.94p, 50p	○●	●	-
ST 372 (ST 274)	Dual Link HD	1920 x 1080	4:4:4 (YCbCr/RGB) 4:4:4:4 (YCbCrA/RGBA)	10	60i, 59.94i, 50i, 30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF 30p, 29.97p, 25p, 24p, 23.98p	○●	●	-
ST 372 (ST 274)	Dual Link HD	1920 x 1080	4:4:4 (YCbCr/RGB)	12	60i, 59.94i, 50i 30p, 29.97p, 25p, 24p, 23.98p	○●	●	-
ST 372 (ST 274)	Dual Link HD	1920 x 1080	4:2:2 (YCbCr)	12	60i, 59.94i, 50i, 30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF 30p, 29.97p, 25p, 24p, 23.98p	○●	●	-
ST 372 (ST 2048-2)	Dual Link HD	2048 x 1080	4:2:2 (YCbCr)	10	60p, 59.94p, 50p, 48p, 47.95p	○●	●	-
ST 372 (ST 2048-2)	Dual Link HD	2048 x 1080	4:4:4 (YCbCr/RGB) 4:4:4:4 (YCbCrA/RGBA)	10	30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF 30p, 29.97p, 25p, 24p, 23.98p	○●	●	-
ST 372 (ST 2048-2)	Dual Link HD	2048 x 1080	4:4:4 (YCbCr/RGB)	12	30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF 30p, 29.97p, 25p, 24p, 23.98p	○●	●	-
ST 372 (ST 2048-2)	Dual Link HD	2048 x 1080	4:2:2 (YCbCr) 4:2:2:4 (YCbCrA)	12	30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF 30p, 29.97p, 25p, 24p, 23.98p	○●	●	-
ST 425-1 (ST 274)	3G Level A (1)	1920 x 1080	4:2:2 (YCbCr)	10	60p, 59.94p, 50p	○●	●	●
ST 425-1 (ST 2048-2)	3G Level A (1)	2048 x 1080	4:2:2 (YCbCr)	10	60p, 59.94p, 50p, 48p, 47.95p	○●	●	●
ST 425-1 (ST 296)	3G Level A (2)	1280 x 720	4:4:4 (YCbCr/RGB) 4:4:4:4 (YCbCrA/RGBA)	10	60p, 59.94p, 50p, 30p, 29.97p	○●	●	●
ST 425-1 (ST 274)	3G Level A (2)	1920 x 1080	4:4:4 (YCbCr/RGB) 4:4:4:4 (YCbCrA/RGBA)	10	60i, 59.94i, 50i, 30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF 30p, 29.97p, 25p, 24p, 23.98p	○●	●	●
ST 425-1 (ST 2048-2)	3G Level A (2)	2048 x 1080	4:4:4 (YCbCr/RGB) 4:4:4:4 (YCbCrA/RGBA)	10	30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF 30p, 29.97p, 25p, 24p, 23.98p	○●	●	●
ST 425-1 (ST 274)	3G Level A (3)	1920 x 1080	4:4:4 (YCbCr/RGB)	12	60i, 59.94i, 50i, 30p, 29.97p, 25p, 24p, 23.98p	○●	●	●
ST 425-1 (ST 2048-2)	3G Level A (3)	2048 x 1080	4:4:4 (YCbCr/RGB)	12	30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF 30p, 29.97p, 25p, 24p, 23.98p	○●	●	●
ST 425-1 (ST 274)	3G Level A (4)	1920 x 1080	4:2:2 (YCbCr)	12	60i, 59.94i, 50i, 30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF 30p, 29.97p, 25p, 24p, 23.98p	○●	●	●
ST 425-1 (ST 2048-2)	3G Level A (4)	2048 x 1080	4:2:2 (YCbCr) 4:2:2:4 (YCbCrA)	12	30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF 30p, 29.97p, 25p, 24p, 23.98p	○●	●	●
ST 425-1 (ST 274)	3G Level B-DL (I)	1920 x 1080	4:2:2 (YCbCr)	10	60p, 59.94p, 50p	○●	●	●
ST 425-1 (ST 2048-2)	3G Level B-DL (I)	2048 x 1080	4:2:2 (YCbCr)	10	60p, 59.94p, 50p, 48p, 47.95p	○●	●	●
ST 425-1 (ST 274)	3G Level B-DL (II)	1920 x 1080	4:4:4 (YCbCr/RGB) 4:4:4:4 (YCbCrA/RGBA)	10	60i, 59.94i, 50i, 30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF 30p, 29.97p, 25p, 24p, 23.98p	○●	●	●
ST 425-1 (ST 2048-2)	3G Level B-DL (II)	2048 x 1080	4:4:4 (YCbCr/RGB) 4:4:4:4 (YCbCrA/RGBA)	10	30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF 30p, 29.97p, 25p, 24p, 23.98p	○●	●	●
ST 425-1 (ST 274)	3G Level B-DL (III)	1920 x 1080	4:4:4 (YCbCr/RGB)	12	60i, 59.94i, 50i, 30p, 29.97p, 25p, 24p, 23.98p	○●	●	●
ST 425-1 (ST 2048-2)	3G Level B-DL (III)	2048 x 1080	4:4:4 (YCbCr/RGB)	12	30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF 30p, 29.97p, 25p, 24p, 23.98p	○●	●	●
ST 425-1 (ST 274)	3G Level B-DL (IV)	1920 x 1080	4:2:2 (YCbCr)	12	60i, 59.94i, 50i, 30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF 30p, 29.97p, 25p, 24p, 23.98p	○●	●	●
ST 425-1 (ST 2048-2)	3G Level B-DL (IV)	2048 x 1080	4:2:2 (YCbCr) 4:2:2:4 (YCbCrA)	12	30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF 30p, 29.97p, 25p, 24p, 23.98p	○●	●	●

## KEY

- - Generator with Gen option and Analyzer
- O - Optional
- - Optional Generator
- A - Analyzer Only
- ‘-’ - Not Available

# Supported 2K/HD IP Formats [Qx & QxL]

The following 2K/HD IP formats are provided as standard on Qx and QxL.

Resolution	Sampling Structure	Pixel Depth	Frame/Field Rate	Qx		QxL	
				2110 HDR	2110 SDR	2110 HDR	2110 SDR
1280 x 720	4:2:2 (YCbCr)	8	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A	OA	A
1280 x 720	4:2:2 (YCbCr)	10	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A	O●	●
1280 x 720	4:4:4(YCbCr/RGB)	8	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A	OA	A
1280 x 720	4:4:4(YCbCr/RGB)	10	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A	O●	●
1920 x 1080	4:2:2(YCbCr)	8	60I, 59.94I, 50I	OA	A	OA	A
1920 x 1080	4:2:2 (YCbCr)	10	60I, 59.94I, 50I	OA	A	O●	●
1920 x 1080	4:2:2(YCbCr)	12	60I, 59.94I, 50I	OA	A	O●	●
1920 x 1080	4:4:4(YCbCr/RGB)	8	60I, 59.94I, 50I	OA	A	OA	A
1920 x 1080	4:4:4(YCbCr/RGB)	10	60I, 59.94I, 50I	OA	A	O●	●
1920 x 1080	4:4:4(YCbCr/RGB)	12	60I, 59.94I, 50I	OA	A	O●	●
1920 x 1080	4:2:2 (YCbCr)	8	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A	OA	A
1920 x 1080	4:2:2 (YCbCr)	10	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A	O●	●
1920 x 1080	4:2:2 (YCbCr)	12	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A	O●	●
1920 x 1080	4:4:4(YCbCr/RGB)	8	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A	OA	A
1920 x 1080	4:4:4(YCbCr/RGB)	10	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A	O●	●
1920 x 1080	4:4:4(YCbCr/RGB)	12	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A	O●	●
1920 x 1080	4:2:2 (YCbCr)	8	30PsF, 29.97PsF, 25PsF, 24PsF, 23.97PsF	OA	A	OA	A
1920 x 1080	4:2:2 (YCbCr)	10	30PsF, 29.97PsF, 25PsF, 24PsF, 23.98PsF	OA	A	O●	●
1920 x 1080	4:2:2 (YCbCr)	12	30PsF, 29.97PsF, 25PsF, 24PsF, 23.97PsF	OA	A	O●	●
1920 x 1080	4:4:4(YCbCr/RGB)	8	30PsF, 29.97PsF, 25PsF, 24PsF, 23.97PsF	OA	A	OA	A
1920 x 1080	4:4:4(YCbCr/RGB)	10	30PsF, 29.97PsF, 25PsF, 24PsF, 23.97PsF	OA	A	O●	●
1920 x 1080	4:4:4(YCbCr/RGB)	12	30PsF, 29.97PsF, 25PsF, 24PsF, 23.97PsF	OA	A	O●	●
2048 x 1080	4:2:2 (YCbCr)	8	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A	OA	A
2048 x 1080	4:2:2 (YCbCr)	10	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A	O●	●
2048 x 1080	4:2:2 (YCbCr)	12	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A	O●	●
2048 x 1080	4:4:4(YCbCr/RGB)	8	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A	OA	A
2048 x 1080	4:4:4(YCbCr/RGB)	10	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A	O●	●
2048 x 1080	4:4:4(YCbCr/RGB)	12	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A	O●	●
2048 x 1080	4:2:2 (YCbCr)	8	30PsF, 29.97PsF, 25PsF, 24PsF, 23.97PsF	OA	A	OA	A
2048 x 1080	4:2:2 (YCbCr)	10	30PsF, 29.97PsF, 25PsF, 24PsF, 23.97PsF	OA	A	O●	●
2048 x 1080	4:2:2 (YCbCr)	12	30PsF, 29.97PsF, 25PsF, 24PsF, 23.97PsF	OA	A	O●	●
2048 x 1080	4:4:4(YCbCr/RGB)	8	30PsF, 29.97PsF, 25PsF, 24PsF, 23.97PsF	OA	A	OA	A
2048 x 1080	4:4:4(YCbCr/RGB)	10	30PsF, 29.97PsF, 25PsF, 24PsF, 23.97PsF	OA	A	O●	●
2048 x 1080	4:4:4(YCbCr/RGB)	12	30PsF, 29.97PsF, 25PsF, 24PsF, 23.97PsF	OA	A	O●	●

## KEY

● - Generator with Gen Option and Analyzer

○ - Optional

A - Analyzer Only

O● - Optional Generator

# Supported 4K/UHD Formats [Qx & QxL]

The following SDI formats are optional on Qx [PHQXO-UHD] and QxL [PHQXO-UHD + PHQXL01-3G / PHQXL01E-3G]

SMPTE Stnds. Link (Content)	Interface	Resolution	Sampling Structure	Pixel Depth	Frame/Field Rate	SDI HDR	SDI SDR
ST 425-3 Annex B.1 (ST 2036-1)	Quad-link HD-SQ	3840 x 2160	4:2:2 (YCbCr)	10	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 425-3 Annex B.1 (ST 2048-1)	Quad-link HD-SQ	4096 x 2160	4:2:2 (YCbCr)	10	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 425-3 Annex B.2, (ST 2036-1)	Dual 3G-B-DS	3840 x 2160	4:2:2 (YCbCr)	10	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 425-3 Annex B.2, (ST 2048-1)	Dual 3G-B-DS	4096 x 2160	4:2:2 (YCbCr)	10	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 2081-10 M1 (ST 2036-1)	6G-2SI	3840 x 2160	4:2:2 (YCbCr)	10	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 2081-10 M1 (ST 2048-1)	6G-2SI	4096 x 2160	4:2:2 (YCbCr)	10	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 425-5 (ST 2036-1)	Quad-link 3G-A, B (1) 2SI	3840 x 2160	4:2:2 (YCbCr)	10	60p, 59.94p, 50p	○ ●	○
ST 425-5 (ST 2048-1)	Quad-link 3G-A, B (1) 2SI	4096 x 2160	4:2:2 (YCbCr)	10	60p, 59.94p, 50p, 48p, 47.95p	○ ●	○
ST 425-5 (ST 2036-1)	Quad-link 3G-A, B (2) 2SI	3840 x 2160	4:4:4 (YCbCr/RGB)	10	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 425-5 (ST 2048-1)	Quad-link 3G-A, B (2) 2SI	4096 x 2160	4:4:4 (YCbCr/RGB) 4:4:4:4 (YCbCrA/RGBA)	10	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 425-5 (ST 2036-1)	Quad-link 3G-A, B (3) 2SI	3840 x 2160	4:4:4 (YCbCr/RGB)	12	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 425-5 (ST 2048-1)	Quad-link 3G-A, B (3) 2SI	4096 x 2160	4:4:4 (YCbCr/RGB)	12	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 425-5 (ST 2036-1)	Quad-link 3G-A, B (4) 2SI	3840 x 2160	4:2:2 (YCbCr)	12	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 425-5 (ST 2048-1)	Quad-link 3G-A, B (4) 2SI	4096 x 2160	4:2:2 (YCbCr) 4:2:2:4 (YCbCrA)	12	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 425-5 Annex B (ST 2036-1)	Quad-link 3G-A, B (1) SQ	3840 x 2160	4:2:2 (YCbCr)	10	60p, 59.94p, 50p	○ ●	○
ST 425-5 Annex B (ST 2048-1)	Quad-link 3G-A, B (1) SQ	4096 x 2160	4:2:2 (YCbCr)	10	60p, 59.94p, 50p, 48p, 47.95p	○ ●	○
ST 425-5 Annex B (ST 2036-1)	Quad-link 3G-A, B (2) SQ	3840 x 2160	4:4:4 (YCbCr/RGB)	10	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 425-5 Annex B, (ST 2048-1)	Quad-link 3G-A, B (2) SQ	4096 x 2160	4:4:4 (YCbCr/RGB) 4:4:4:4 (YCbCrA/RGBA)	10	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 425-5 Annex B (ST 2036-1)	Quad-link 3G-A, B (3) SQ	3840 x 2160	4:4:4 (YCbCr/RGB)	12	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 425-5 Annex B, (ST 2048-1)	Quad-link 3G-A, B (3) SQ	4096 x 2160	4:4:4 (YCbCr/RGB)	12	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 425-5 Annex B (ST 2036-1)	Quad-link 3G-A, B (4) SQ	3840 x 2160	4:2:2 (YCbCr)	12	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 425-5 Annex B, (ST 2048-1)	Quad-link 3G-A, B (4) SQ	4096 x 2160	4:2:2 (YCbCr) 4:2:2:4 (YCbCrA)	12	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 2081-11 M1, ST 425-5 (ST 2036-1)	Dual-link 6G-2SI (I)	3840 x 2160	4:2:2 (YCbCr)	10	60p, 59.94p, 50p	○ ●	○
ST 2081-11 M1, ST 425-5 (ST 2048-1)	Dual-link 6G-2SI (I)	4096 x 2160	4:2:2 (YCbCr)	10	60p, 59.94p, 50p, 48p, 47.95p	○ ●	○
ST 2081-11 M1, ST 425-5 (ST 2036-1)	Dual-link 6G-2SI (II)	3840 x 2160	4:4:4 (YCbCr/RGB)	10	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 2081-11 M1, ST 425-5 (ST 2048-1)	Dual-link 6G-2SI (II)	4096 x 2160	4:4:4 (YCbCr/RGB) 4:4:4:4 (YCbCrA/RGBA)	10	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 2081-11 M1 ST 425-5 (ST 2036-1)	Dual-link 6G-2SI (III)	3840 x 2160	4:4:4 (YCbCr/RGB)	12	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 2081-11 M1, ST 425-5 (ST 2048-1)	Dual-link 6G-2SI (III)	4096 x 2160	4:4:4 (YCbCr/RGB)	12	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 2081-11 M1 ST 425-5 (ST 2036-1)	Dual-link 6G-2SI (IV)	3840 x 2160	4:2:2 (YCbCr/RGB)	12	30p, 29.97p, 25p, 24p, 23.98p	● ○	○
ST 2081-11 M1 ST 425-5 (ST 2048-1)	Dual-link 6G-2SI (IV)	4096 x 2160	4:2:2 (YCbCr) 4:2:2:4 (YCbCrA)	12	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 2082-10 M1, ST 425-5 (ST 2036-1)	12G-2SI (I)	3840 x 2160	4:2:2 (YCbCr)	10	60p, 59.94p, 50p	○ ●	○
ST 2082-10 M1, ST 425-5 (ST 2048-1)	12G-2SI (I)	4096 x 2160	4:2:2 (YCbCr)	10	60p, 59.94p, 50p, 48p, 47.95p	○ ●	○
ST 2082-10 M1 ST 425-5 (ST 2036-1)	12G-2SI (II)	3840 x 2160	4:4:4 (YCbCr/RGB) 4:4:4:4 (YCbCrA/RGBA)	10	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 2082-10 M1 ST 425-5 (ST 2048-1)	12G-2SI (II)	4096 x 2160	4:4:4 (YCbCr/RGB) 4:4:4:4 (YCbCrA/RGBA)	10	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 2082-10 M1 ST 425-5 (ST 2036-1)	12G-2SI (III)	3840 x 2160	4:4:4 (YCbCr/RGB)	12	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 2082-10 M1 ST 425-5 (ST 2048-1)	12G-2SI (III)	4096 x 2160	4:4:4 (YCbCr/RGB)	12	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 2082-10 M1 ST 425-5 (ST 2036-1)	12G-2SI (IV)	3840 x 2160	4:2:2 (YCbCr) 4:2:2:4 (YCbCrA)	12	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○
ST 2082-10 M1 ST 425-5 (ST 2048-1)	12G-2SI (IV)	4096 x 2160	4:2:2 (YCbCr) 4:2:2:4 (YCbCrA)	12	30p, 29.97p, 25p, 24p, 23.98p	○ ●	○

## KEY

○ - Optional

● - Generator with Option PHQXO-GEN and Analyzer

# Supported 4K/UHD IP Formats [QxL Only]

The following 4K/UHD ST 2110 formats are optional and can be added to QxL only [PHQXO-UHD].

Resolution	Sampling Structure	Pixel Depth	Frame/Field Rate	QxL	
				2110 HDR	2110 SDR
3840 x 2160	4:2:2 (YCbCr)	8	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A
3840 x 2160	4:2:2 (YCbCr)	10	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	O ●	●
3840 x 2160	4:2:2 (YCbCr)	12	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	O ●	●
3840 x 2160	4:4:4(YCbCr/RGB)	8	30p, 29.97p, 25p, 24p, 23.98p	OA	A
3840 x 2160	4:4:4(YCbCr/RGB)	10	30p, 29.97p, 25p, 24p, 23.98p	O ●	●
3840 x 2160	4:4:4(YCbCr/RGB)	12	30p, 29.97p, 25p, 24p, 23.98p	O ●	●
4096 x 2160	4:2:2(YCbCr)	8	60p, 59.94p, 50p, 48p, 47.97p, 30p, 29.97p, 25p, 24p, 23.98p	OA	A
4096 x 2160	4:2:2 (YCbCr)	10	60p, 59.94p, 50p, 48p, 47.95p, 30p, 29.97p, 25p, 24p, 23.98p	O ●	●
4096 x 2160	4:2:2 (YCbCr)	12	60p, 59.94p, 50p, 48p, 47.95p, 30p, 29.97p, 25p, 24p, 23.98p	O ●	●
4096 x 2160	4:4:4(YCbCr/RGB)	8	30p, 29.97p, 25p, 24p, 23.98p	OA	A
4096 x 2160	4:4:4(YCbCr/RGB)	10	30p, 29.97p, 25p, 24p, 23.98p	O ●	●
4096 x 2160	4:4:4(YCbCr/RGB)	12	30p, 29.97p, 25p, 24p, 23.98p	O ●	●

## KEY

● - Generator with Gen Option and Analyzer

O - Optional

A - Analyzer Only

OA - Optional Analyzer


The following 4K/UHD ST 2110 extended formats are optional and can be added to QxL only [PHQXO-EUHD].

Resolution	Sampling Structure	Pixel Depth	Frame/Field Rate	QxL	
				2110 HDR	2110 SDR
3840 x 2160	RGB:444	8	60p, 59.94p, 50p, 48p, 47.97p	OA	OA
3840 x 2160	RGB:444	10	60p, 59.94p, 50p, 48p, 47.97p	OA	OA
3840 x 2160	RGB:444	12	660p, 59.94p, 50p, 48p, 47.97p	OA	OA
3840 x 2160	YCbCr:444	8	60p, 59.94p, 50p, 48p, 47.97p	OA	OA
3840 x 2160	YCbCR:444	10	60p, 59.94p, 50p, 48p, 47.97p	OA	OA
3840 x 2160	YCbCR:444	12	60p, 59.94p, 50p, 48p, 47.97p	OA	OA
<b>4K FORMATS</b>					
4096 x 2160	RGB:444	8	60p, 59.94p, 50p, 48p, 47.97p	OA	OA
4096 x 2160	RGB:444	10	60p, 59.94p, 50p, 48p, 47.97p	OA	OA
4096 x 2160	RGB:444	12	60p, 59.94p, 50p, 48p, 47.97p	OA	OA
4096 x 2160	YCbCr:444	8	60p, 59.94p, 50p, 48p, 47.97p	OA	OA
4096 x 2160	YCbCR:444	10	60p, 59.94p, 50p, 48p, 47.97p	OA	OA
4096 x 2160	YCbCR:444	12	60p, 59.94p, 50p, 48p, 47.97p	OA	OA


## KEY

OA - Optional Analyzer


# Dimensions and Installation

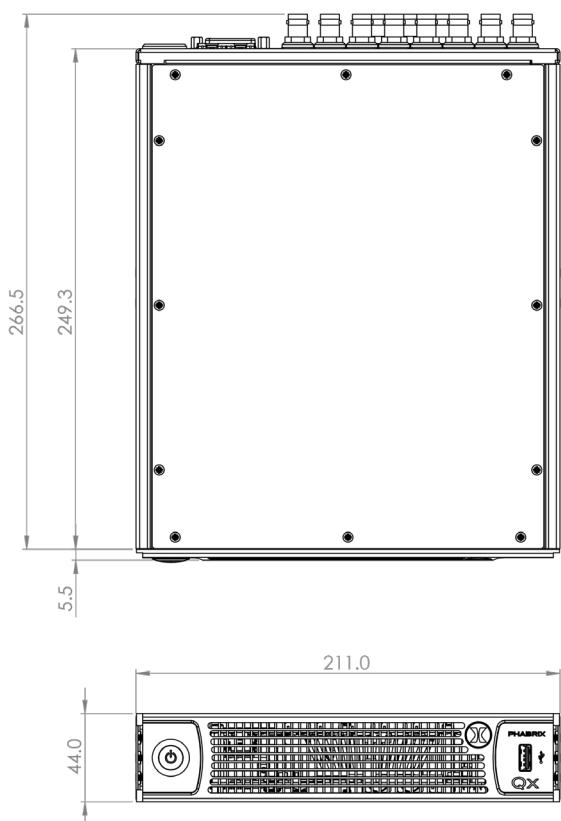


Desktop

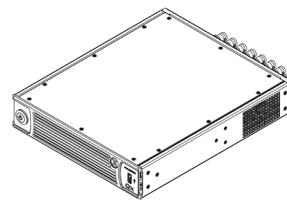

Single Rack mount tray  
with cover  
PHQXK1

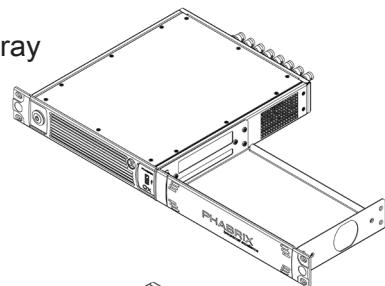

Dual Rack mount  
PHQXK2

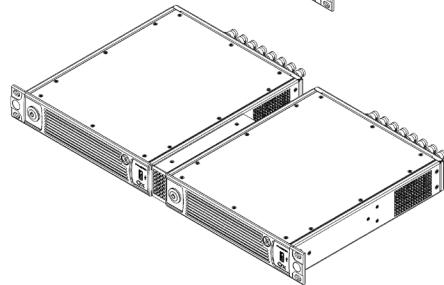

**PHABRIX®**

A Leader Company

For more information about IP, SDI, 4K/UHD and HDR,  
contact: [www.phabrix.com](http://www.phabrix.com)



Floating Point Company Limited  
[sales@floatingpoint.com.hk](mailto:sales@floatingpoint.com.hk)  
[www.floatingpoint.com.hk](http://www.floatingpoint.com.hk)



This brochure is to be used for informational use only and is subject to change without notice and should not be construed as commitment  
by PHABRIX. PHABRIX assumes no responsibility or liability for errors or inaccuracies that may appear in this brochure.  
Please visit [www.phabrix.com](http://www.phabrix.com) for latest product information

February 2022